


2015-2016
LG
Commercial TV
Catalog




LG B2B Ukraine
str. Novokonistyninivskaya 2
04080 Kyiv, Ukraine
E-mail: info@lg-b2b.com.ua
www.lg-b2b.com.ua

www.lg-b2b.com.ua <https://www.facebook.com/LGB2BUkraine>
All screen images are simulated. Dimension and weights are approximate.
Design, features and specifications subject to change without notice.
© Copyright 2015-16 LG Electronics Inc. All Rights Reserved. Pro:Centric, the "LG" logo, are registered
trademarks or trademarks of LG Electronics Inc. All other trademarks or registered trademarks are the
property of their respective owners.



A New Standard of Hospitality

LG's latest commercial TV line up offers comprehensive solutions enhancing the experience your hotel offers. Premium design and state-of-the-art technology provides you with easy installation and management, and your guests with an incredible user experience they won't forget.

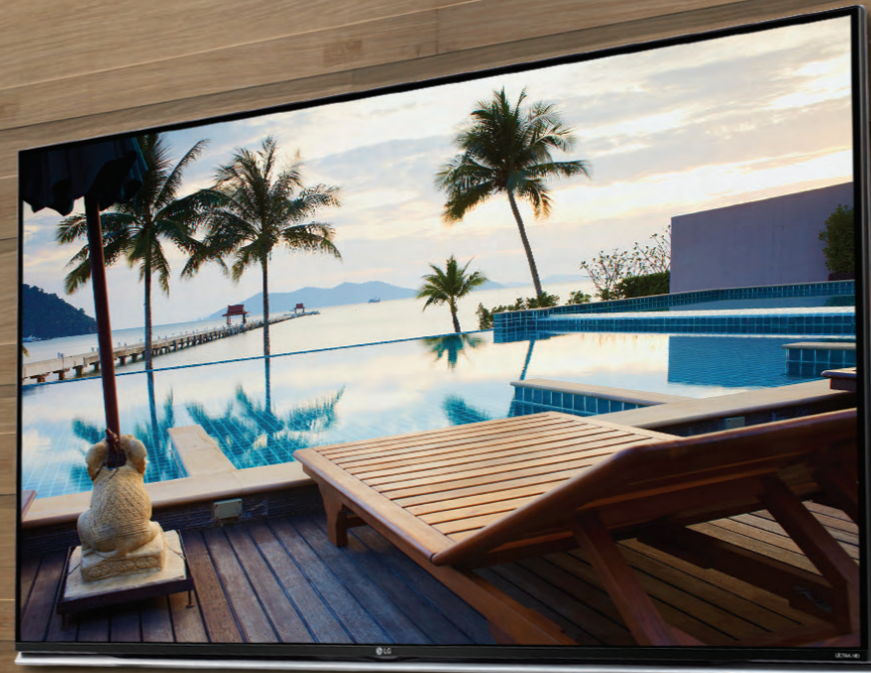



LG Commercial TV Line up

Pro:Centric[®] SMART

9 Series
/ 7 Series

- CINEMA SCREEN (for 9 series)
- Sound enhanced (for 9 series)
- ULTRA HD (for 9 series)
- Smart Connectivity (WiDi, Miracast, WiFi Direct)
- Input Picker
- AllJoyn (for 9 series), DIAL
- Bluetooth Sound Sync
- Pro:Centric Smart SDK

Pro:Centric[®] V

5 Series

- Pro:Centric App.
 - Instant On
 - Welcome Video/screen
 - Pro:Centric lite*
- *Only available in LX530H/541H of SCA, LX341H /330H of CH.

Commercial Lite

3 Series

- Welcome Video/screen
- Hotel Mode
- IR Out
- USB Auto Playback
- ULTRA HD (Asia, China, Korea)

SUPER SIGN[™] TV

LX540S
LX530S

- Simple Connectivity
- Fail Over
- Content Management

Pro:Centric[®] SMART

The Smart Solution for an extraordinary stay

Provides your guests with the smart solution for a better stay. Stunning design improves the ambience in any hotel room while innovative TV technology offers customers easy-to-use and extensive options to improve their stay.



Heighten your Hotel Room Experience



CINEMA SCREEN

CINEMA SCREEN design brings the cinematic viewing experience through the minimized bezel. With the narrow bezel, not only your guests can enjoy immersive viewing experience, but you also convey messages in a more effective way.

* For UX970H, UX960H

Enhanced Sound * For UX970H, UX960H



Sound Designed by harman/kardon

harman/kardon brings a new level of premium sound up to its reputation as one of the global audio brands. The superb sound quality creates an environment that is as immersive as the viewing.



Frontal Speaker

With a built-in forward facing, frontal speaker system, guests will enjoy truly powerful room-filling sound for a more immersive entertainment experience.

ULTRA HD * For UX970H, UX960H



4K Resolution

ULTRA HD is the future of digital picture, possessing four times higher resolution than that of full HD. Stunning 8.3 million pixels gives a flawless picture quality and incredibly vivid detail.



4K Upscaler

Enjoy Full HD content in 4K ULTRA HD quality. The 4K Upscaler automatically upgrades Full HD content to ULTRA HD through the six steps of the upscaling process.

Smart Experience


webOS Commercial TV **webOS**

LG Pro:Centric SMART offers webOS Commercial TV user interface and customizable tools. Also, our partners can optimize commercial TVs with IP-based programs to provide premium services according to their business environment.




Simple Switching

webOS offers incredible user experiences with an intuitive user interface and fast response time.

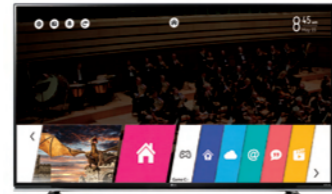

Simple Customization

LG Commercial Smart Home will allow hotel sites to make their own Smart Home by selecting and ordering Apps with launcher based.

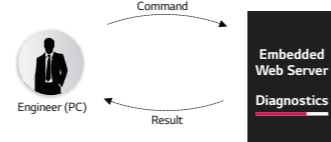

Simple Management

webOS provides remote diagnostics and signal monitoring via an embedded web server enabling SI or LG engineers to check TV or signal information easily.

Fast Booting Time



Applications and launcher boot time has been significantly reduced by optimizing the firmware

DIAL



DIAL is a simple way of enjoying portable devices' content on a TV without any physical connection to TV.

Bluetooth Sound Sync



By bluetooth connection between a mobile device and commercial TV, Bluetooth Sound Sync enables users to listen to music on a mobile device through TV speakers

Input Picker




Input Picker shows interface connection status and offers intuitive user interface navigation enabling faster connectivity.

Smart Customization

Pro:Centric Smart SDK

LG Pro:Centric SMART offers extended customizable tools; HTML5, Java and Flash. With these, the partners can optimize Commercial TVs to edit and develop their own enhanced service design. Also, it gives visual impact on and delivers messages to customers as users intend.

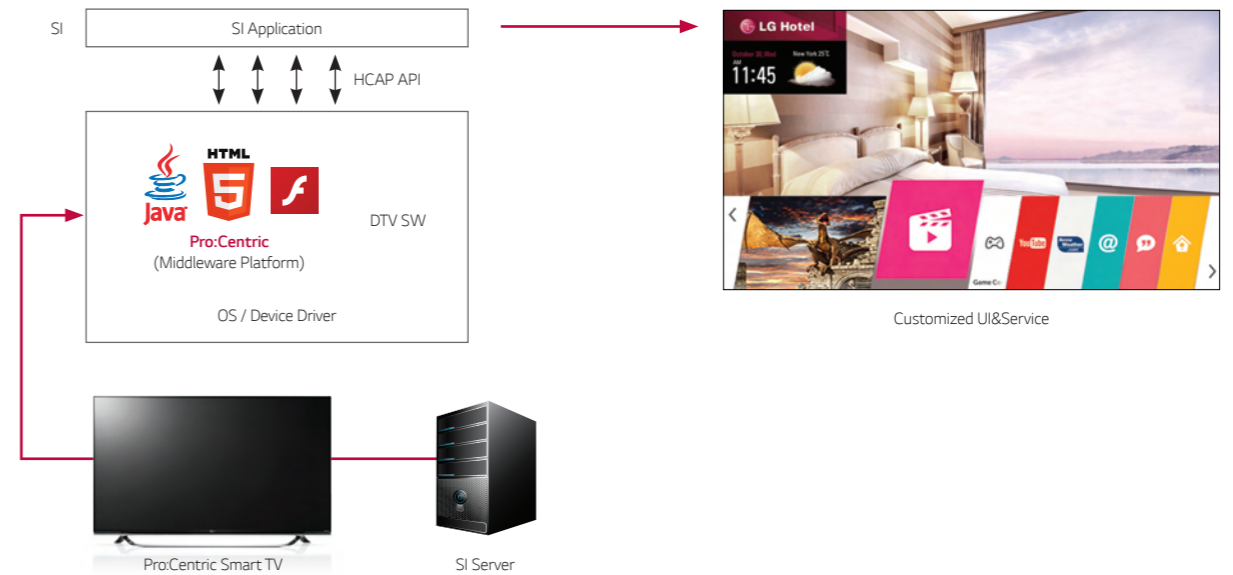

Smart Management

EzManger



EzManager provides convenient installation function that helps to set up Pro:Centric TV settings automatically without extra effort of configuration. Auto-installation requires 1-3 minutes while manual installation requires 3-5 minutes.

Remote Diagnostics



Save big on the expenses of managing the commercial TVs with Remote Diagnostics. Real-time Remote Diagnostics report detects error in advance to prevent TVs from any malfunction.

Pro:Centric[®] SMART Product Line up

*Spec may be varied by regions.



UX970H/UX960H

79" / 65" / 60" / 55" / 49"

webOS

UHD & 3D

- 4K Upscaler / 3D

CINEMA SCREEN & Exclusive Sound

- Ultra Slim & Narrow Bezel
- Frontal Speaker
- Ultra Surround Sound

Simple Connectivity

- SmartShare(WiDi, Miracast), WiFi Direct


Pro:Centric Smart

- Easy Customization
- SDK (HTML5, Java, Flash)

Easy Management & Usability

- Instant on / AllJoyn / Pro:Idiom / DIAL / b-LAN(UX970H Only)
- EzManager
- Remote Diagnostics

*Model image and size may vary by regions.

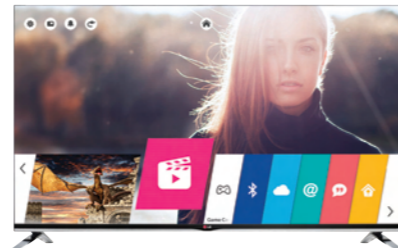

LY970H/LY960H

60" / 55" / 47" / 42"

webOS

Simple Connectivity

- Smart Share(WiDi, Miracast), WiFi Direct

CINEMA SCREEN & Exclusive Sound

- Ultra Slim & Narrow Bezel
- Frontal Speaker
- Ultra Surround Sound

Pro:Centric Smart

- Easy Customization
- SDK (HTML5, Java, Flash)

Easy Management & Usability

- Pro:Idiom / b-LAN(LY970H Only)
- EzManager
- Remote Diagnostics

*Model image and size may vary by regions.



LY761H

55" / 47" / 42" / 39" / 32"

webOS

Simple Connectivity

- Smart Share(WiDi, Miracast), WiFi Direct


Pro:Centric Smart

- Easy Customization
- SDK (HTML5, Java, Flash)

Easy Management & Usability

- Pro:Idiom
- EzManager
- Remote Diagnostics

*Model image and size may vary by regions.

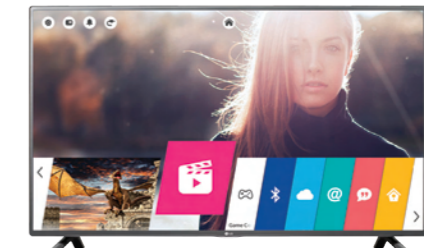

LY760H

55" / 47" / 42" / 39" / 32"

webOS

Simple Connectivity

- Smart Share(WiDi, Miracast), WiFi Direct

Pro:Centric Smart

- Easy Customization
- SDK (HTML5, Java, Flash)

Easy Management & Usability

- Pro:Idiom
- EzManager
- Remote Diagnostics

*Model image and size may vary by regions.



LX770H

65" / 55" / 49" / 43" / 40"

webOS

Simple Connectivity

- SmartShare(WiDi, Miracast), WiFi Direct

Pro:Centric Smart

- Easy Customization
- SDK (HTML5, Java, Flash)

Easy Management & Usability

- Instant on / Pro:Idiom / DIAL / b-LAN
- EzManager
- Remote Diagnostics

*Model image and size may vary by regions.



LX761H

65" / 55" / 49" / 43" / 40" / 32"

webOS

Simple Connectivity

- SmartShare(WiDi, Miracast), WiFi Direct

Pro:Centric Smart

- Easy Customization
- SDK (HTML5, Java, Flash)

Easy Management & Usability

- Instant on / Pro:Idiom / DIAL
- EzManager
- Remote Diagnostics

*Model image and size may vary by regions.



LY751H

55" / 47" / 42" / 32"

Simple Connectivity

- SmartShare(WiDi, Miracast), WiFi Direct

Pro:Centric Smart

- Easy Customization
- SDK (HTML5, Java, Flash)

Easy Management & Usability

- Pro:Idiom
- EzManager
- Remote Diagnostics

*Model image and size may vary by regions.



LY750H

55" / 47" / 42" / 32"

Simple Connectivity

- SmartShare(WiDi, Miracast), WiFi Direct

Pro:Centric Smart

- Easy Customization
- SDK (HTML5, Java, Flash)

Easy Management & Usability

- Pro:Idiom
- EzManager
- Remote Diagnostics

*Model image and size may vary by regions.

Pro:Centric® V

The Comprehensive Solution to Hospitality


Pro:Centric® V makes hotel management more efficient helping you to provide your guests with a more comfortable and convenient experience.



Customizable Guest Room Solution Pro:Centric® Application


PMS Interfaced Services

The Pro:Centric® Application included in the Pro:Centric® server provides customizable templates, enabling hoteliers to add hotel branded portal pages and channels. It also offers guest-centric services, such as a welcome page with the guest's name, auto language setting and billing information with the Property Management System(PMS) interface.

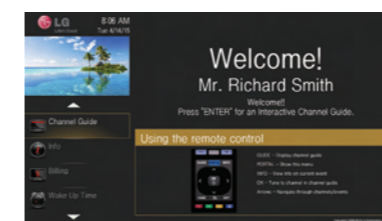


Welcome Message

Warm greeting message including guest's name.

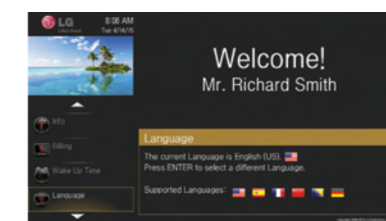

Automatic language setting

Default language settings based on the guest's nationality.

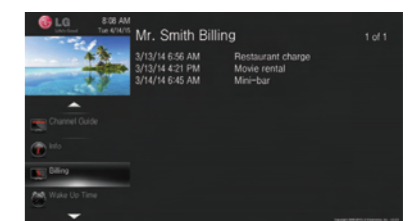

Billing info

Guest's billing information automatically updated via PMS.

Instant On



The high speed loading system enables users to enjoy content immediately after turning on the TV.

Multi Video Channel for Hotel Advertisement




Operation of up to 22 hotel channels offers various information and additional services to customers.

Preloaded App



Guests can be served with bandwidth-worry-free pre-loaded applications.

Advanced Wake Up Time

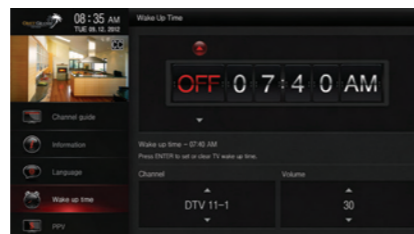

With the alarm function guests are able to set a wake up time as well as channel and volume.

Remote Manager



With Pro:Centric Server, Hotel IT managers can remotely setup the configuration of TVs instead of visiting rooms.

Self Diagnostics



Enables service engineers to recognize technical issues in a TV quickly and easily through a USB stick. The TV stores any technical issues encountered and delivers them to a USB device. Service engineers use this information to analyze technical issues instead of visiting sites.

Pro:Centric® Lite

The cost effective LG Pro:Centric® Lite application allows for modification of hotel information to fit your service. Without an extra server or set-top-box, value added TV service can be delivered with a single USB drive.

*Only available in LX530H/541H of SCA, LX341H /330H of CH.



Product Line up

*Spec may be varied by regions.



LX570H

65" / 55" / 49" / 43" / 40" / 32"

- Pro:Centric V**
- Easy Content Creation & Management
 - Enhanced Customer Experience
- Easy Management & Usability**
- PMS interfaced service
 - Instant On / b-LAN
 - EzManager
 - Self Diagnostics

*Model image and size may vary by regions.



LX560H

49" / 43" / 40" / 32"

- Pro:Centric V**
- Easy Content Creation & Management
 - Enhanced Customer Experience
 - SDK (HTML5, Java, Flash)
- Easy Management & Usability**
- PMS interfaced service
 - Instant On / DIAL
 - EzManager
 - Self Diagnostics

*Model image and size may vary by regions.



LX541H

60" / 55" / 49" / 43" / 40" / 32"

- Pro:Centric V**
- Easy Content Creation & Management
 - Enhanced Customer Experience
- Easy Management & Usability**
- PMS interfaced service
 - Instant On
 - EzManager
 - Self Diagnostics

*Model image and size may vary by regions.



LX530H

42" / 32"

- Pro:Centric V**
- Easy Content Creation & Management
 - Enhanced Customer Experience
- Easy Management & Usability**
- PMS interfaced service
 - Instant On
 - EzManager
 - Self Diagnostics

*Model image and size may vary by regions.

Commercial Lite

Simple Solutions, Commercial Capability

Designed specifically for hospitality and business environments, LG Commercial TVs display superb HD images and videos in conjunction with user-friendly interfaces to create a more hospitable welcome for guests and customers. Also, with its simple installation and management solution, users are easily able to set TVs and prevent misuse by customers. These features are parts of the reasons Commercial Lite are utilized in various verticals.



Expanded Branding



Welcome Video

Make customers feel more welcome and cared for with TVs that possess the capability for a greater variation in greeting messages.

Simple & Effective Maintenance

USB Cloning




The fully automated USB Cloning feature allows you to simply copy the TV settings to all TVs with astonishing speed.

USB Auto Playback



In various locations, LG Commercial TVs will play content from external storage automatically and repeatedly.

IR Out

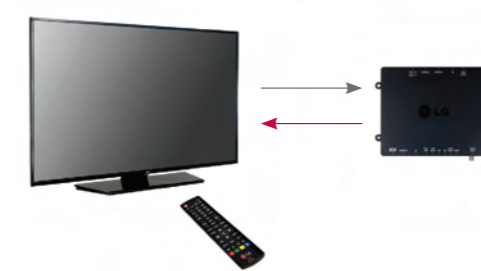

Using the interactive set-top-box, all LG TVs can be controlled with a single remote.

Hotel Mode



Be in total control with Hotel Mode. Have the capability to change every TV setting, or reset to default in every room.

Commercial Lite Product Line up

*Spec may be varied by regions.



UX340H/UX340C

79" / 65" / 55" / 49" / 43"

- UHD & 3D**
 - 4K Upscaler / 3D
- Hospitality Solution**
 - Welcome Screen/Video
- Easy Management & Usability**
 - Self Diagnostics
 - USB Cloning
 - Lock Mode
- Essential Signage Feature**
 - USB Auto Playback

*Model image and size may vary by regions.
*79" is for UX340C



LX341C

65" / 60" / 55" / 49" / 43"

- Hospitality Solution**
 - Welcome Screen/Video
- Easy Management & Usability**
 - Self Diagnostics
 - USB Cloning
 - Lock Mode
- Essential Signage Feature**
 - USB Auto Playback

*Model image and size may vary by regions.



LX300C

49" / 43" / 32"

- Hospitality Solution**
 - Welcome Screen/Video
- Easy Management & Usability**
 - Self Diagnostics
 - USB Cloning
 - Lock Mode
- Essential Signage Feature**
 - USB Auto Playback

*Model image and size may vary by regions.



LX330C

55" / 50" / 42" / 32"

- Hospitality Solution**
 - Welcome Screen/Video
- Easy Management & Usability**
 - Self Diagnostics
 - USB Cloning
 - Lock Mode
- Essential Signage Feature**
 - USB Auto Playback

*Model image and size may vary by regions.



LX310C

49"/43"

- Hospitality Solution**
 - Welcome Screen/Video
- Easy Management & Usability**
 - Self Diagnostics
 - USB Cloning
 - Lock Mode
- Essential Signage Feature**
 - USB Auto Playback

*Model image and size may vary by regions.





Super Solutions on Display

LG SUPERSIGN™ TVs offer built-in, cost effective display solutions, allowing you to deliver messages with impact without the need for any additional hardware or software.



Product Line up

*Spec may be varied by region.



LX540S

65" / 60" / 55" / 49" / 43"

- Welcome Screen
- USB Cloning
- IR-Out
- USB auto playback
- SuperSign Lite/W/C/M/N 3.0 compatibility
- SuperSign Simple Editor compatibility
- Wi-Fi dongle ready
- Fail over
- MHL



LX530S

55" / 42"

- Welcome Screen
- USB Cloning
- IR-Out
- USB auto playback
- SuperSign Lite/W/C/M/N 3.0 compatibility
- SuperSign Simple Editor compatibility
- Wi-Fi dongle ready
- Fail over
- MHL


Simple Connectivity



External media players have been eliminated reducing total cost of ownership and with built-in SoC* and Wi-Fi dongle support, installation has been simplified.


* System on Chip

Fail Over

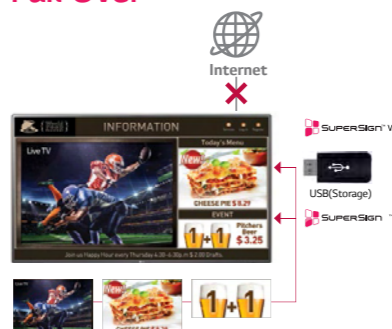

The USB Fail Over function enables content to be displayed without dead spots when no input signal is to be activated.

Content Management

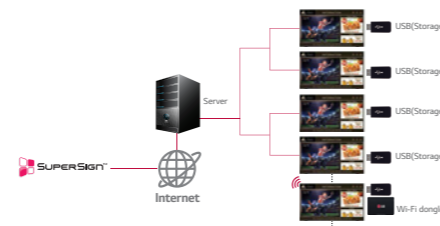

The SUPERSIGN™ Solution provides total content management. Features include digital media editing, scheduling, distribution, and management capabilities.

Solutions for SuperSign™ TV



Web-based Contents Authoring and Operation Solution Player

- Connections Up to 50 Clients
- Solution Suitable for SMB
- Supports Dual Content Editor in both PC App and Web



Web-based Contents Authoring and Operation Solution Player

- Licensed Version
- Connections Up to 1,000 Clients
- Solution Suitable for Enterprise
- Multi-User Account Management
- Supports Dual Content Editor in both PC App and Web



Monitor Control & Auto Calibration S/W

- Remote Monitor Control Solution
- Enhanced Auto Calibration - More Accurate Color Adjustment in 2~3 Minutes

Global Line up_2015

EU

UX960H : 60°/55°/49"
 LY960H : 55°/47°/42"
 LX761H : 55°/49°/43°/40°/32"
 LY761H/760H : 55°/47°/42°/39°/32"
 LX541H : 55°/49°/43°/40°/32"
 LX530H : 28°/22"
 LX341H : 43°
 LX331H : 32°
 LX330H : 42°/32"
 LX321H : 32°/43°
 LX320H : 42°/32"
 LX341C : 65°/60°/55°/49°/43°
 LX330C : 32°
 LX321C : 43°
 LX320C : 42°/32°/28°/22°
 LX310C : 49°/43°
 LX300C : 32°
 LY540M : 28°/22°
 LX540S : 60°/55°/49°/43°
 LX530S : 42°

CIS

UX960H : 60°/55°/49"
 LY960H : 55°/47°/42"
 LX761H : 55°/49°/43°/40°/32"
 LY750H : 55°/47°/42°/32"
 LX541H : 55°/49°/43°/40°/32"
 LX341C : 65°/60°/55°/49°/43°/32"
 LF551C : 49°/42°/32°/28°
 LX318C : 49°/43°
 LX308C : 32°
 LX540S : 60°/55°/49°/43°
 LX530S : 42°

China

LX761H : 65°/55°/49°/43°
 LX341H : 55°/49°/43°
 LX330H : 32°
 UX340C : 65°/55°
 UX310C : 49°/43°
 LX341C : 60°/55°/49°/43°
 LX330C : 60°/55°/49°/43°
 LX310C : 49°/43°
 LX300C : 49°/43°/32°
 LX540S : 55°/49°/43°
 LX530S : 42°

HongKong

LX761H : 65°/55°/49°/43°
 LX330C : 55°/50°/42°/32°

Taiwan

LY540H : 47°/32°
 LX341C : 55°/49°
 LX330C : 42°/32°

NA

UX970H : 79°/65°/55°/49°
 LY970H : 60°/55°/47°/42°
 LX770H : 65°/55°/49°/43°/40°
 LX570H : 65°/55°/49°/43°/40°/32°
 LX560H : 49°/43°/40°/32°
 UX340H : 65°/55°/49°/43°
 UX340C : 79°/65°/55°/49°/43°
 LX340H : 55°/49°/43°/40°/32°
 LX341C : 65°/60°/55°/49°/43°
 LX330C : 42°/32°
 LX310C : 49°/43°
 LX300C : 32°
 LX770M : 43°/32°
 LX570M : 43°/32°/28°/22°
 LX540S : 65°/60°/55°/49°/43°
 LX530S : 42°

SCA(ATSC)

UX970H : 79°/65°/55°/49°
 LY970H : 60°/55°/47°/42°
 LX770H : 65°/55°/49°/43°/40°
 LX570H : 65°/55°/49°/43°/40°/32°
 LX560H : 49°/43°/40°/32°
 UX340H : 65°/55°/49°/43°
 LX341C : 65°/60°/55°/49°/43°
 LX330C : 42°/32°
 LX310C : 49°/43°
 LX570M : 43°/32°/28°/22°
 LX540S(Columbia Only) : 65°/55°/49°/43°
 LX530S : 42°

SCA(ISDB-T)

LX761H : 43°
 LX541H : 43°
 LX530H : 42°/32°
 LY340H : 42°/32°
 LX341C : 55°/49°/43°
 LX330C : 42°/32°
 LX310C : 49°/43°
 LX300C : 49°/43°/32°
 LX540S : 43°
 LX530S : 55°/42°

Korea


LX761H : 55°/49°/43°
 LX541H : 60°/55°/49°/43°
 LX530H : 32°/42°
 UX340C : 55°/49°/43°
 LX330C : 50°/42°
 LX312C : 49°/43°
 LX310C : 49°/43°
 LF531C : 32°
 LX300C : 49°/43°/32°
 LX530S : 55°/49°/43°

ASIA

LY960H : 60°/55°/47°/42°
 LY755H : 55°/47°/42°/32°
 LX761H : 55°/49°/43°/32°
 LX545H : 55°/49°/43°/32°
 LX541H : 60°/49°/43°
 LX531H : 42°
 LX530H : 32°/28°
 UX340C : 79°/65°/55°
 LX341C : 65°/60°/55°/49°/43°
 LX330C : 42°/32°
 LY330C : 28°/22°
 LX310C : 49°/43°
 LX300C : 32°
 LX540S : 60°/55°/49°/43°
 LX530S : 42°/32°

MEA

UX960H : 79°/60°/55°/49°
 LY960H : 60°/55°/47°/42°
 LX761H : 55°/49°/43°/32°
 LX541H : 55°/49°/43°/32°
 LX341C : 60°/55°/49°
 LX330C : 32°
 LX310C : 49°/43°
 LX300C : 32°
 LX540S : 60°/55°/49°/43°
 LX530S : 42°



NA

Series	LX341C	LX330C	LX310C	LX300C
Model Info				
Region	NA	NA	NA	NA
Size	43"/49"/55"/60"/65"	32"/42"	43"/49"	32"
Analog	NTSC	NTSC	NTSC	NTSC
Digital	ATSC/QAM/VSF	ATSC/QAM/VSF	ATSC/QAM/VSF	ATSC/QAM/VSF
Video				
Resolution	1920 x 1080 (FHD)	42: 1920 x 1080 (FHD) 32: 1366 x 768 (HD)	1920 x 1080 (FHD)	1366 x 768 (HD)
Audio				
Audio Output	10W + 10W	10W + 10W	5W + 5W	3W + 3W
Feature				
Pro-Centric	Type(Smart/Value/Lite)	-	-	-
	Streaming Type (IP/RF)	-	-	-
Smart	RF (1/2 Tuner)	-	-	-
	HCAP (GEM/FLASH/HTML)	-	-	-
Connectivity	Commercial Smart Home Application	-	-	-
	Web Browser	-	-	-
Management	SmartShare(Movie/Photo/Music)	-	-	-
	WIDI (PC to TV)	-	-	-
Interactivity	Smart Mirroring (Mobile to TV)	-	-	-
	WIFI Direct	-	-	-
Usability	MHL	-	-	-
	Remote diagnostics/ Self diagnostics	Self diagnostics	Self diagnostics	Self diagnostics
Security	EdiManager	-	-	-
	HDMI-CEC	-	-	-
Interface	HTNG-CEC	-	-	-
	Built-in WiFi	-	-	-
External Power	Soft AP	-	-	-
	DRM	-	-	-
RJP Interface	Welcome Screen/Welcome Video	•/•	•/•	•/•
	Lock Mode	•	•	•
Smart Energy Saving	One Channel Map / Logical Channel Map	-	-	-
	Multi IR Code	•	•	•
Anti-theft System	Hotel Mode / Public Display Mode	•	•	•
	Instant ON	-	-	-
USB Cloning	USB Cloning	•	•	•
	IR Out	-	-	-
External Speaker Out	USB Auto Playback	•	•	•
	External Power	-	-	-
RJP Interface	External Speaker Out	•(Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 1W with 8Ω)	•(Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 1W with 8Ω)	-
	Auto Off / Auto Sleep	•(LG/Teledapt (RS232C) Teleadapt/Guestlink (HDMI CEC))	•(LG/Teledapt (RS232C) Teleadapt/Guestlink (HDMI CEC))	•(LG/Teledapt (RS232C) Teleadapt/Guestlink (HDMI CEC))
Smart Energy Saving	Auto Off / Auto Sleep	•	•	•
	Smart Energy Saving	•	•	•
Anti-theft System	Anti-theft System	Kensington Lock (Stand)	Kensington Lock (B/C)	-
	Interface			
Side	HDMI In	1	1	1
	USB	1	1	1
Rear	CI Slot	-	-	-
	Headphone Out	-	-	-
AV In	AV In	-	-	-
	RF In	1	1	1
AV In(Composite)	AV In(Composite)	(Sharing with Component in)	1(Sharing with Component in)	1(Sharing with Component in)
	Component In (Y, Pb, Pr) + Audio(L/R)	1	1	1
Digital Audio Out (Optical)	Digital Audio Out (Optical)	1	1	-
	RGB In (D-sub 15pin)	1	1	-
Clock Interface (D-sub 15pin)	Clock Interface (D-sub 15pin)	-	-	-
	PC Audio Input	1(Sharing with Component in)	1(Sharing with Component in)	1(Sharing with Component Audio)
USB	USB	-	-	1
	Headphone Out (3.5mm Phone Jack)	-	-	-
RS-232C(D-sub 9pin)	RS-232C(D-sub 9pin)	1	1	1
	HDMI In	1	1	1
LAN(RJ45)	LAN(RJ45)	-	-	-
	Full Scart	-	-	-
MPLI Port(RJ12)	MPLI Port(RJ12)	-	-	-
	RJP interface (RJ45)	-	-	-
Ext SPK out (3.5mm Phone Jack)	Ext SPK out (3.5mm Phone Jack)	1	1	-
	Power			
Voltage, Hz	110-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz
Typical(Watts)	43": 39 49": 46 55": 54 60": 63 65": 66	32": 28 42": 39	43": 29.1 49": 34.4	22 (subject to change)
Stand-by	0.5W	0.5W	0.5W	0.5W
Dimension				
Set Size (W/O Stand, WxHxD, mm)	43": 973 x 573 x 55.1 49": 1,106 x 647 x 55.1 55": 1,242 x 724 x 55.1 60": 1,363 x 792 x 57.1 65": 1,461 x 848 x 57.3	32": 732 x 437 x 55.5 42": 961 x 567 x 55.5	43": 971 x 575 x 58.7 49": 1,103 x 650 x 58.7	734 x 474 x 71
Set Size (With Stand, WxHxD, mm)	43": 973 x 625 x 193 49": 1,106 x 697 x 220 55": 1,242 x 774 x 220 60": 1,363 x 844 x 294 65": 1,461 x 899 x 294	32": 732 x 481 x 207 42": 961 x 610 x 218	43": 971 x 624 x 198 49": 1,103 x 698 x 198	734 x 474 x 172
Set Weight (With Stand, Set, kg)	43": 13.6 49": 17.6 55": 20.9 60": 29.3 65": 34	32": 6.2 42": 9.5	43": 9.8 49": 13.4	4.7
Tool				
Swivel (angle)	-	-	-	-
VESA Compatibility	43": 200 X 200 49"/55"/65": 300 X 300	32": 200 X 200 42": 400 X 400	43": 200 X 200 49": 300 X 300	200 X 200
Standard Approval				
Safety	UL, FCC	UL, FCC	UL, FCC	UL, FCC
Environment	RoHS	RoHS	RoHS	RoHS
Etc.	cUL, NOM, Energy Star 7.0	cUL, NOM, Energy Star 7.0	RoHS, cUL, NOM, Energy Star 7.0	RoHS, cUL, NOM, Energy Star 6.1

Series	LX770M	LX570M	LX540S	LX530S
Model Info				
Region	NA	NA	NA	NA
Size	32"/43"	22"/28"/32"/43"	43"/49"/55"/60"/65"	42"
Analog	NTSC	NTSC	NTSC	NTSC
Digital	ATSC/QAM/VSF	ATSC/QAM/VSF	ATSC/QAM/VSF	ATSC/QAM/VSF
Video				
Resolution	1920 x 1080 (FHD)	32"/43": 1920 x 1080 (FHD) 22"/28": 1366 x 768 (HD)	1920 x 1080 (FHD)	1920 x 1080 (FHD)
Audio				
Audio Output	43": 10W+10W 32": 5W+5W	43": 10W + 10W 22"/28"/32": 5W + 5W	10W + 10W	10W + 10W
Feature				
Pro-Centric	Type(Smart/Value/Lite)	Smart	Value	-
	Streaming Type (IP/RF)	IP/RF	RF	-
Smart	RF (1/2 Tuner)	2 Tuner	1 Tuner	-
	HCAP (GEM/FLASH/HTML)	GEM / Flash / HTML	GEM / Flash	-
Connectivity	Commercial Smart Home Application	•	-	-
	Web Browser	•	-	-
Management	SmartShare(Movie/Photo/Music)	•	-	-
	WIDI (PC to TV)	•	-	-
Interactivity	Smart Mirroring (Mobile to TV)	•	-	-
	WIFI Direct	•	-	-
Usability	MHL	-	-	-
	Remote diagnostics/ Self diagnostics	•	Remote diagnostics	Self diagnostics
Security	EdiManager	•	•	•
	HDMI-CEC	•	•	•
Interface	HTNG-CEC	•(Built-in type)	•	•
	Built-in WiFi	-	-	-
External Power	Soft AP	•	-	-
	DRM	ProIdiom	-	-
RJP Interface	Welcome Screen/Welcome Video	•/•	•/•	•/•
	Lock Mode	•	•	•
Smart Energy Saving	One Channel Map / Logical Channel Map	•	-	-
	Multi IR Code	•	•	•
Anti-theft System	Hotel Mode / Public Display Mode	•	•	•
	Instant ON	•	-	-
USB Cloning	USB Cloning	•	•	•
	IR Out	•(MPI Jack)	•(MPI Jack)	•(RS-232C)
External Speaker Out	USB Auto Playback	-	-	-
	External Power	-	-	-
RJP Interface	External Speaker Out	•(Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 1W with 8Ω)	•(Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 1W with 8Ω, Audio line out)	•(Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 1W with 8Ω)
	Auto Off / Auto Sleep	•(HDMI)	•(LG/Teledapt (RS232C), Teleadapt/Guestlink (HDMI CEC))	•(LG/Teledapt (RS232C), Teleadapt/Guestlink (HDMI CEC))
Smart Energy Saving	Auto Off / Auto Sleep	•	•	•
	Smart Energy Saving	•	•	•
Anti-theft System	Anti-theft System	Kensington Lock	Kensington Lock	Kensington Lock
	Interface			
Side	HDMI In	2	1	1
	USB	1	1	2
Rear	CI Slot	-	-	-
	Headphone Out	-	-	-
AV In	AV In	-	1(3.5mm phone jack, only 22H/28H*)	-
	RF In	1	1	1
AV In(Composite)	AV In(Composite)	1	1(only 32/43")	1(Sharing with Component in)
	Component In (Y, Pb, Pr) + Audio(L/R)	-	-	1
Digital Audio Out (Optical)	Digital Audio Out (Optical)	1	1	1
	RGB In (D-sub 15pin)	1	-	1
Clock Interface (D-sub 15pin)	Clock Interface (D-sub 15pin)	-	-	-
	PC Audio Input	1(Sharing with AV In)	1(Sharing with AV In)	1(Sharing with Component in)
USB	USB	-	-	-
	Headphone Out (3.5mm Phone Jack)	-	-	-
RS-232C(D-sub 9pin)	RS-232C(D-sub 9pin)	1(SVC, 3.5mm phone jack)	1	1
	HDMI In	1	1	1
LAN(RJ45)	LAN(RJ45)	-	-	-
	Full Scart	-	-	-
MPLI Port(RJ12)	MPLI Port(RJ12)	1	1	-
	RJP interface (RJ45)	-	-	-
Ext SPK out (3.5mm Phone Jack)	Ext SPK out (3.5mm Phone Jack)	1	1	1
	Power			
Voltage, Hz	120V	110V, 50/60Hz	110-240V, 50/60Hz	110-240V, 50/60Hz
Typical(Watts)	32": 37 42": 58	TBD	49": 80.6 55": 93.3 60": 135.3 65": 142.9	78
Stand-by	0.5W	0.5W	0.5W	0.5W
Dimension				
Set Size (W/O Stand, WxHxD, mm)	32": 734 x 438 x 55.3 42": 973 x 573 x 55.1	22": 507.6 x 315.7 x 53.1 28": 641.5 x 395.8 x 57.6 32": 734 x 438 x 55.3 43": 973 x 573 x 55.1	43": 973 x 573 x 37(SPK 55.1) 49": 1,106 x 647 x 37(SPK 55.1) 55": 1,242 x 724 x 37(SPK 55.1) 60": 1,363 x 792 x 39(SPK 57.1) 65": 1,461 x 848 x 39(SPK 57.3)	961 x 567 x 55.5
Set Size (With Stand, WxHxD, mm)	-	-	43": 973 x 625 x 193 49": 1,106 x 697.5 x 220 55": 1,242 x 774 x 220 60": 1,363 x 844 x 294 65": 1,461 x 899 x 294	961 x 610 x 218
Set Weight (With Stand, Set, kg)	32": 5.3 43": 10.2	22": TBD 28": TBD 32": 5.3 43": 10.2	49": 12.7 49": 17.6 55": 20.9 60": 29.3 65": 34	9.5
Tool				
Swivel (angle)	-	-	-	-
VESA Compatibility	200 X 200	22": 75 X 75 28": 100 X 100 32"/43": 200 X 200	43": 200 X 200 49"/55"/60"/65": 300 X 300	400 X 400
Standard Approval				
Safety	UL, FCC	UL, FCC	UL, FCC	UL, FCC
Environment	RoHS	RoHS	RoHS	RoHS
Etc.	cUL, NOM, Energy Star 6.1	cUL, NOM, Energy Star 7.0	cUL, NOM, Energy Star 7.0	cUL, NOM, Energy Star 7.0

SCA

Series	UX970H	LY970H	LX770H	LX570H
Model Info				
Region	SCA-ATSC	SCA(Colombia/Mexico/Panama)	SCA-ATSC	SCA-ATSC
Size	49"/55"/65"/79"	42"/47"/55"/60"	40"/43"/49"/55"/65"	32"/40"/43"/49"/55"/65"
Analog	NTSC	NTSC	NTSC	NTSC
Digital	ATSC/QAM/USB	ATSC/QAM/USB	ATSC/QAM/USB	ATSC/QAM/USB
Video				
Resolution	3840 x 2160 (UHD)	1920 x 1080 (FHD)	1920 x 1080 (FHD)	1920 x 1080 (FHD)
Audio				
Audio Output	10W + 10W	12W+ 12W	10W + 10W	40"/43"/49"/55"/65" : 10W + 10W 32" : 5W + 5W
Feature				
Pro-Centric	Type(Smart/Value/Lite)	Smart	Smart	Smart
	Streaming Type (P/P/F)	IP/P/F	IP/P/F	IP/P/F
Smart	RF (1/2 Tuner)	2 Tuner	1 Tuner	1 Tuner
	HCAP (GEM/FLASH/HTML)	GEM / Flash / HTML	GEM / Flash / HTML	GEM / Flash / HTML
Connectivity	Commercial Smart Home	-	-	-
	SmartShare(Movie/Photo/Music)	-	-	-
Management	WIDI (PC to TV)	-	-	-
	Smart Mirroring (Mobile to TV)	-	-	-
Interactivity	Remote diagnostics/ Self diagnostics	Remote diagnostics	Remote diagnostics	Remote diagnostics
	EdManager	-	-	-
Usability	HDMI-CEC	-	-	-
	HTNG-CEC	-	-	-
Security	Built-In WiFi	-	-	-
	Soft AP	-	-	-
Interface	DRM	ProIdiom	ProIdiom	ProIdiom
	Welcome Screen/Welcome Video	-	-	-
External Power	External Speaker Out	*(Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND.L+.R.), 1W with 8Ω)	*(Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND.L+.R.), 1W with 8Ω)	*(Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND.L+.R.), 1W with 8Ω)
	RJP Interface	*(RJ45, HDMI)	*(RJ45, HDMI)	*(RJ45, HDMI)
Anti-theft System	Auto Off / Auto Sleep	-	-	-
	Smart Energy Saving	-	-	-
Interface				
Side	HDMI In	2	2	2
	USB	1	1	1
Rear	AV In (Composite)	1(Sharing with Component in)	1(Sharing with Component in)	1(Sharing with Component in)
	PC Audio Input	1(Sharing with Component in)	1(Sharing with Component in)	1(Sharing with AV In)
Power	Voltage, Hz	110~240V, 50/60Hz	110~240V, 50/60Hz	110~240V, 50/60Hz
	Typical(Watts)	TBD	42" : - 47" : 47.4 55" : 58.4 60" : 65.7	TBD
Dimension	Stand-by	0.5W	0.5W	0.5W
	Set Size (WxHxD, mm)	49" : 1,095.1 x 649.5 x 51.3 55" : 1,234.8 x 727.3 x 50.8 60" : 1,453.7 x 850.5 x 51.6 79" : 1,770.4 x 1,025.2 x 59.5	42" : 949 x 560 x 55.1 47" : 1,061 x 623 x 55.1 55" : 1,231 x 718 x 55.1 60" : 1,338.4 x 778.8 x 58.1	40" : 911 x 528 x 55.3 43" : 973 x 573 x 55.3 49" : 1,106 x 647 x 55.1 55" : 1,242 x 724 x 55.1 65" : 1,461 x 848 x 57.3
Tool	Swivel (angle)	-	-	-
	VESA Compatibility	49"/55"/65" : 300 X 300 79" : 400 X 600	400 X 400	40"/43" : 200 X 200 49"/55"/65" : 300 X 300
Standard Approval				
Safety	UL, FCC	UL, FCC	UL, FCC	UL, FCC
Environment	RoHS	RoHS	RoHS	RoHS
Etc.	cUL, NOM, Energy Star 7.0	cUL, NOM, Energy Star 6.1	cUL, NOM, Energy Star 7.0	cUL, NOM, Energy Star 7.0

Series	LX560H	UX340H	LX341C	LX330C
Model Info				
Region	SCA-ATSC	SCA-ATSC	SCA-ATSC	SCA-ATSC
Size	32"/40"/43"/49"	43"/49"/55"/60"/65"	43"/49"/55"/60"/65"	32"/42"
Analog	NTSC	NTSC	NTSC	NTSC
Digital	ATSC/QAM/USB	ATSC/QAM/USB	ATSC/QAM/USB	ATSC/QAM/USB
Video				
Resolution	1920 x 1080 (FHD)	3840 x 2160 (UHD)	1920 x 1080 (FHD)	42" : 1920 x 1080 (FHD) 32" : 1366 x 768 (HD)
Audio				
Audio Output	40"/43"/49" : 10W + 10W 32" : 5W + 5W	10W + 10W	10W + 10W	10W + 10W
Feature				
Pro-Centric	Type(Smart/Value/Lite)	Value	-	-
	Streaming Type (P/P/F)	-	-	-
Smart	RF (1/2 Tuner)	1 Tuner	-	-
	HCAP (GEM/FLASH/HTML)	GEM / Flash	-	-
Connectivity	Commercial Smart Home	-	-	-
	SmartShare(Movie/Photo/Music)	-	-	-
Management	WIDI (PC to TV)	-	-	-
	Smart Mirroring (Mobile to TV)	-	-	-
Interactivity	Remote diagnostics/ Self diagnostics	Self diagnostics	Self diagnostics	Self diagnostics
	EdManager	-	-	-
Usability	HDMI-CEC	-	-	-
	HTNG-CEC	-	-	-
Security	Built-In WiFi	-	-	-
	Soft AP	-	-	-
Interface	DRM	ProIdiom	ProIdiom	ProIdiom
	Welcome Screen/Welcome Video	-	-	-
External Power	External Speaker Out	*(Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND.L+.R.), 1W with 8Ω)	*(Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND.L+.R.), 1W with 8Ω)	*(Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND.L+.R.), 1W with 8Ω)
	RJP Interface	-	*(LG/Teledapt (RS232C) Teledapt/Guestlink (HDMI CEC))	*(LG/Teledapt (RS232C) Teledapt/Guestlink (HDMI CEC))
Anti-theft System	Auto Off / Auto Sleep	-	-	-
	Smart Energy Saving	-	-	-
Interface				
Side	HDMI In	2	1	1
	USB	1	1	1
Rear	AV In (Composite)	1	1(Sharing with Component in)	1(Sharing with Component in)
	PC Audio Input	1(Sharing with AV In)	1(Sharing with Component in)	1(Sharing with Component in)
Power	Voltage, Hz	110~240V, 50/60Hz	110~240V, 50/60Hz	110~240V, 50/60Hz
	Typical(Watts)	TBD	43" : 39 49" : 46 55" : 54 60" : 63 65" : 66	32" : 28 42" : 39
Dimension	Stand-by	0.5W	0.5W	0.5W
	Set Size (WxHxD, mm)	32" : 734 x 438 x 55.3 40" : 911 x 528 x 55.3 43" : 973 x 573 x 55.1 49" : 1,106 x 647 x 55.1 55" : 1,242 x 724 x 55.1 65" : 1,461 x 848 x 57.3	43" : 971 x 570 x 56.4 49" : 1,104 x 645 x 56.7 55" : 1,240 x 722 x 56.7 60" : 1,363 x 792 x 57.1 65" : 1,461 x 848 x 57.3	43" : 973 x 573 x 55.1 49" : 1,106 x 647 x 55.1 55" : 1,242 x 724 x 55.1 60" : 1,363 x 792 x 57.1 65" : 1,461 x 848 x 57.3
Tool	Swivel (angle)	-	-	-
	VESA Compatibility	32"/40"/43" : 200 X 200 49" : 300 X 300	*(RS232C, HDMI)	43" : 200 X 200 49" : 15.9 55" : 19.7 60" : 29.3 65" : 29.6
Standard Approval				
Safety	UL, FCC	UL, FCC	UL, FCC	UL, FCC
Environment	RoHS	RoHS	RoHS	RoHS
Etc.	cUL, NOM, Energy Star 7.0	cUL, NOM, Energy Star 7.0	cUL, NOM, Energy Star 7.0	cUL, NOM, Energy Star 7.0

SCA

Series	LX310C	LX570M	LX540S	LX530S	
Model Info					
Region	SCA-ATSC	SCA-ATSC	SCA-ATSC(Columbia Only)	SCA-ATSC(Columbia Only)	
Size	43"/49"	22"/28"/32"/43"	43"/49"/55"/65"	42"	
Analog	NTSC	NTSC	PAL-M/N / NTSC-M	PAL-M/N / NTSC-M	
Digital	ATSC/QAM/VS	ATSC/QAM/VS	DVB-T2	DVB-T2	
Video					
Resolution	1920 x 1080 (FHD)	32"/43" : 1920 x 1080 (FHD) 22"/28" : 1366 x 768 (HD)	1920 x 1080 (FHD)	1920 x 1080 (FHD)	
Audio					
Audio Output	5W + 5W	43" 10W + 10W 22"/28" : 5W + 5W	10W + 10W	10W + 10W	
Feature					
Pro-Centric	Type(Smart/Value/Lite) Streaming Type (P/P/R) RF (1/2 Tuner) HCAP (GEM/FLASH/HTML)	- - 1 Tuner GEM / Flash	- - - -	- - - -	
Smart	Commercial Smart Home Application Web Browser SmartShare(Movie/Photo/Music)	- - - -	- - - -	- - - -	
Connectivity	WIDI (PC to TV) Smart Mirroring (Mobile to TV) WiFi Direct MHL	- - - -	- - - -	- - - -	
Management	Remote diagnostics/ Self diagnostics EzManager	Self diagnostics *Express Script)	Self diagnostics -	Self diagnostics -	
Interactivity	HDMI-CEC HTNG-CEC Built-in WiFi	- - -	- - -	- - -	
Usability	Soft AP	-	-	-	
Security	DRM	-	-	-	
Welcome Screen/Welcome Video	*/-	*/-	*/-	*/-	
Lock Mode	-	-	-	-	
One Channel Map / Logical Channel Map	-	-	-	-	
Multi IR Code	-	-	-	-	
Hotel Mode / Public Display Mode	-	-	-	-	
Instant ON	-	-	-	-	
USB Cloning	-	-	-	-	
IR Out	-	*MPLI Jack	*RS-232C	*RS-232C	
USB Auto Playback	-	-	-	-	
External Power	-	-	-	-	
External Speaker Out	-	*Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 1W with 8Ω	*Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 1W with 8Ω	*Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 1W with 8Ω	
RJP Interface	*LG/Teledapt (RS232C) Teledapt/Guestlink (HDMI CEC)	*LG/Teledapt (RS232C), Teledapt/Guestlink (HDMI CEC)	*LG/Teledapt (RS232C), Teledapt/Guestlink (HDMI CEC)	*LG/Teledapt (RS232C), Teledapt/Guestlink (HDMI CEC)	
Auto Off / Auto Sleep	-	-	-	-	
Smart Energy Saving	-	-	-	-	
Anti-theft System	-	Kensington Lock (B/C)	Kensington Lock	Kensington Lock	
Interface					
Side	HDMI In	1	1	1	
	USB	1	1	2	
	CI Slot	-	-	-	
	Headphone Out	-	-	1	
	AV in	-	1(3.5mm phone jack, only 22"/28")	-	
	RF In	1	1	1	
	AV In(Composite)	1(Sharing with Component in)	1(only 32"/43")	1(Sharing with Component in)	1(Sharing with Component in)
	Component In (Y, Pb, Pr) + Audio(L,R)	1	-	1	1
	Digital Audio Out (Optical)	-	1	1	1
	RGB In (D-sub 15pin)	1	-	1	1
	Clock Interface (D-sub 15pin)	-	-	-	-
	PC Audio Input	1(Sharing with Component Audio)	1(Sharing with AV In)	1(Sharing with Component in)	1(Sharing with Component in)
	USB	-	-	-	-
	Headphone Out (3.5mm Phone Jack)	-	-	-	-
	RS-232C(D-sub 9pin)	1	-	1	1
Rear	HDMI In	1	1	1	
	LAN(RJ45)	-	-	1	
	Full Scart	-	-	-	
	MPI Port(RJ12)	-	1	-	
	RJP interface (RJ45)	-	-	-	
	Ext SPK out (3.5mm Phone Jack)	-	1	1	
	Power	110~240V, 50/60Hz	110V, 50/60Hz	110~240V, 50/60Hz	110~240V, 50/60Hz
Typical(Watts)	43" : 29.1 49" : 34.4	-	43" : 80.6 49" : 80.6 55" : 103.6 65" : 142.9	83	
	Stand-by	0.5W	0.5W	0.3W	
	Dimension				
Set Size (W/O Stand, WxHxD, mm)	43" : 971 x 575 x 58.7 49" : 1,103 x 650 x 58.7	22" : 507.6 x 315.7 x 53.1 28" : 611.5 x 386.6 x 57.6 32" : 724 x 438 x 55.3 43" : 973 x 573 x 55.1	43" : 973 x 573 x 37(SPK 55.1) 49" : 1,106 x 647 x 37(SPK 55.1) 55" : 1,242 x 724 x 37(SPK 55.1) 65" : 1,461 x 848 x 39(SPK 57.3)	961 x 567 x 55.5	
Set Size (With Stand, WxHxD, mm)	43" : 971 x 624 x 198 49" : 1,103 x 698 x 198	-	43" : 973 x 625 x 193 49" : 1,106 x 697.5 x 220 55" : 1,242 x 774 x 220 65" : 1,461 x 899 x 294	961 x 610 x 218	
Set Weight (With Stand, Set, kg)	43" : 9.8 42" : 13.4	-	43" : 12.7 49" : 17.6 55" : 20.9 65" : 34	9.5	
Tool					
Swivel (angle)	-	-	-	-	
VESA Compatibility	43" : 200 X 200 49" : 300 X 300	22" : 75 X 75 28" : 100 X 100 32"/43" : 200 X 200	43" : 200 X 200 49"/55"/65" : 300 X 300	400 X 400	
Standard Approval					
Safety	UL	UL, FCC	CB	CB	
Environment	FCC	RoHS	RoHS	RoHS	
Etc.	RoHS, cUL, NOM, Energy Star 7.0	cUL, NOM, Energy Star 7.0	cUL, NOM, Energy Star 7.0	cUL, NOM, Energy Star 7.0	

Series	LX761H	LX541H	LX530H	LY340H	LX341C	
Model Info						
Region	SCA-ISDB-T	SCA-ISDB-T	SCA-ISDB-T	SCA(Brazil Only)	SCA-ISDB-T	
Size	43"	43"	32"/42"	32"/42"	43"/49"/55"	
Analog	PAL-M/N / NTSC-M	PAL-M/N / NTSC-M	PAL-M/N / NTSC-M	PAL-M/N / NTSC-M	PAL-M/N / NTSC-M	
Digital	ISDB-T	ISDB-T	ISDB-T	ISDB-T	ISDB-T	
Video						
Resolution	1920 x 1080 (FHD)	1920 x 1080 (FHD)	42" : 1920 x 1080 (FHD) 32" : 1366 x 768 (HD)	42" : 1920 x 1080 (FHD) 32" : 1366 x 768 (HD)	1920 x 1080 (FHD)	
Audio						
Audio Output	10W + 10W	10W + 10W	10W + 10W	10W + 10W	10W + 10W	
Feature						
Pro-Centric	Type(Smart/Value/Lite) Streaming Type (P/P/R) RF (1/2 Tuner) HCAP (GEM/FLASH/HTML)	Smart - 1 Tuner GEM / Flash / HTML	Lite - - GEM / Flash	- - - GEM / Flash	- - - -	
Smart	Commercial Smart Home Application Web Browser SmartShare(Movie/Photo/Music)	*EzManager *IP) -	- - -	- - -	- - -	
Connectivity	WIDI (PC to TV) Smart Mirroring (Mobile to TV) WiFi Direct MHL	- - - -	- - - -	- - - -	- - - -	
Management	Remote diagnostics/ Self diagnostics EzManager	Remote diagnostics -	Self diagnostics -	Self diagnostics -	Self diagnostics -	
Interactivity	HDMI-CEC HTNG-CEC Built-in WiFi	- - -	- - -	- - -	- - -	
Usability	Soft AP	-	-	-	-	
Security	DRM	Proctidom	-	-	-	
Welcome Screen/Welcome Video	*/-	*/-	*/-	*/-	*/-	
Lock Mode	-	-	-	-	-	
One Channel Map / Logical Channel Map	-	-	-	-	-	
Multi IR Code	-	-	-	-	-	
Hotel Mode / Public Display Mode	-	-	-	-	-	
Instant ON	-	-	-	-	-	
USB Cloning	-	-	-	-	-	
IR Out	-	*RS-232C	*RS-232C	*RS-232C	*RS-232C	
USB Auto Playback	-	-	-	-	-	
External Power	-	-	-	-	-	
External Speaker Out	-	-	-	-	-	
RJP Interface	*LG/Teledapt (RS232C) Teledapt/Guestlink (HDMI CEC)	*LG/Teledapt (RS232C) Teledapt/Guestlink (HDMI CEC)	*LG/Teledapt (RS232C) Teledapt/Guestlink (HDMI CEC)	*LG/Teledapt (RS232C) Teledapt/Guestlink (HDMI CEC)	*LG/Teledapt (RS232C) Teledapt/Guestlink (HDMI CEC)	
Auto Off / Auto Sleep	-	-	-	-	-	
Smart Energy Saving	-	-	-	-	-	
Anti-theft System	-	Kensington Lock	Kensington Lock	Kensington Lock	Kensington Lock	
Interface						
Side	HDMI In	1	1	1	1	
	USB	2	2	2	2	
	CI Slot	-	-	-	-	
	Headphone Out	1	-	-	-	
	AV in	1	-	-	-	
	RF In	1	1	1	1	
	AV In(Composite)	1	1(Share with Component)	1(Share with Component)	1(Sharing with Component in)	1(Share with Component)
	Component In (Y, Pb, Pr) + Audio(L,R)	-	1	1	1	1
	Digital Audio Out (Optical)	1	1	1	1	1
	RGB In (D-sub 15pin)	-	1	1	1	1
	Clock Interface (D-sub 15pin)	-	-	-	-	-
	PC Audio Input	1	1(Share with Component)	1(Share with Component)	1(Sharing with Component Audio)	1(Share with Component)
	USB	-	-	-	-	-
	Headphone Out (3.5mm Phone Jack)	-	-	-	-	-
	RS-232C(D-sub 9pin)	1	1(Control & Service)	1(Control & Service)	1(Control & Service)	1(Control & Service)
Rear	HDMI In	1	1	1	1	
	LAN(RJ45)	2	-	-	-	
	Full Scart	-	-	-	-	
	MPI Port(RJ12)	-	-	-	-	
	RJP interface (RJ45)	-	-	-	-	
	Ext SPK out (3.5mm Phone Jack)	2(Spk-out 1, Vol. Control 1)	-	-	-	
	Power	110~240V, 50/60Hz	110~240V, 50/60Hz	110~240V, 50/60Hz	110~240V, 50/60Hz	110~240V, 50/60Hz
Typical(Watts)	TBD	80.6	32" : 58.8 42" : 84.3	32" : 52 42" : 81	43" : 80.6 55" : 113	
	Stand-by	0.5W	0.5W	0.5W	0.5W	
	Dimension					
Set Size (W/O Stand, WxHxD, mm)	973 x 573 x 55.1	973 x 573 x 55.1	32" : 732 x 437 x 55.5 42" : 961 x 567 x 55.5	32" : 732 x 437 x 55.5 42" : 961 x 567 x 55.5	43" : 973 x 573 x 55.1 49" : 1,106 x 647 x 55.1 55" : 1,242 x 724 x 55.1	
Set Size (With Stand, WxHxD, mm)	973 x 624 x 325	973 x 624 x 325	32" : 732 x 481 x 207 42" : 961 x 610 x 218	32" : 732 x 481 x 207 42" : 961 x 612 x 218	43" : 973 x 625 x 193 49" : 1,106 x 697 x 220 55" : 1,242 x 774 x 220	
Set Weight (With Stand, Set, kg)	13.6	13.6	32" : 6.2 42" : 9.5	32" : 6.2 42" : 9.5	43" : 13.6 49" : 17.6 55" : 20.9	
Tool						
Swivel (angle)	-	-	-	-	-	
VESA Compatibility	200 X 200	200 X 200	32" : 200 X 200 42" : 400 X 400	32" : 200 X 200 42" : 400 X 400	43" : 200 X 200 49"/55" : 300 X 300	
Standard Approval						
Safety	CB	CB	CB	CB, CU TR	CB	
Environment	-	-	-	CE	-	
Etc.	RoHS	RoHS	RoHS	RoHS	RoHS	

SCA

Series	UX390C	LX310C	LX300C	LX40S	LX50S
Model Info					
Region	SCA-ISDB-T	SCA-ISDB-T	SCA-ISDB-T	SCA-ISDB-T	SCA-ISDB-T
Size	32"/42"	43"/49"	43"/49"	43"	42"/55"
Analog	PAL-M/N / NTSC-M	PAL-M/N / NTSC-M	PAL-M/N / NTSC-M	PAL-M/N / NTSC-M	PAL-M/N / NTSC-M
Digital	ISDB-T	ISDB-T	ISDB-T	ISDB-T	ISDB-T
Video					
Resolution	42": 1920 x 1080 (FHD) 32": 1366 x 768 (HD)	1920 x 1080 (FHD)	43"/49": 1920 x 1080 (FHD) 32": 1366 x 768 (HD)	1920 x 1080 (FHD)	1920 x 1080 (FHD)
Audio					
Audio Output	10W + 10W	5W + 5W	43"/49": 5W + 5W 32": 3W + 3W	10W + 10W	10W + 10W
Feature					
Pro-Centric	Type(Smart/Value/Lite)	-	-	-	-
	Streaming Type (P/P/RF)	-	-	-	-
Smart	Commercial Smart Home	-	-	-	-
	Application	-	-	-	-
Connectivity	SmartShare(Movie/Photo/Music)	-	-	-	-
	Smart Mirroring (Mobile to TV)	-	-	-	-
Management	Remote diagnostics/ Self diagnostics	-	Self diagnostics	Self diagnostics	Self diagnostics
	HDMI-CEC	-	-	-	-
Usability	Soft AP	-	-	-	-
	DRM	-	-	-	-
Security	Welcome Screen/Welcome Video	*/	*/	*/	*/
	Lock Mode	-	-	-	-
Interface	HDMI In	1	1	-	1
	USB	2	2	-	2
Rear	Headphone Out (3.5mm Phone Jack)	-	-	-	-
	RS-232C-sub 9pin	1(Control & Service)	1(Control & Service)	1(Control & Service)	1(Control & Service)
Power	Voltage, Hz	110~240V, 50/60Hz	110~240V, 50/60Hz	110~240V, 50/60Hz	110~240V, 50/60Hz
	Typical(Watts)	32": 58.8 42": 84.3	TBD	TBD	43": 80.6 55": 91.1
Dimension	Stand-by	0.5W	0.5W	0.5W	0.3W
	Set Size (With Stand, WxHxD, mm)	32": 732 x 437 x 55.5 42": 961 x 567 x 55.5	43": 971 x 575 x 58.7 49": 1,103 x 650 x 58.7	32": 734 x 474 x 71 43": 976 x 583 x 81.5 49": 1,108 x 667 x 81.5	43": 973 x 573 x 37(SPK 55.1)
Tool	Swivel (angle)	-	-	-	-
	VEESA Compatibility	32" : 200 X 200 42" : 400 X 400	300 X 300	32"/43" : 200 X 200 49" : 300 X 300	200 X 200
Standard Approval	Safety	CB	CB	CB	CB
	Environment	RoHS	RoHS	RoHS	RoHS

EU

Series	UX960H	LY960H	LX761H	LY761H/LY760H
Model Info				
Region	EU	EU	EU	EU
Size	49"/55"/60"	42"/47"/55"	32"/39"/43"/49"/55"	32"/39"/43"/47"/55"
Analog	PAL/SECAM	PAL/SECAM	PAL/SECAM	PAL/SECAM
Digital	DVB-T2/C/S2	DVB-T2/C/S2	DVB-T2/C/S2	DVB-T2/C/S2
Video				
Resolution	3840 x 2160 (UHd)	1920 x 1080 (FHD)	1920 x 1080 (FHD)	1920 x 1080 (FHD)
Audio				
Audio Output	10W + 10W	10W + 10W	10W + 10W	10W + 10W
Feature				
Pro-Centric	Type(Smart/Value/Lite)	Smart	Smart	Smart
	Streaming Type (P/P/RF)	P/P/RF	P/P/RF	P/P/RF
Smart	Commercial Smart Home	-	-	-
	Application	-	-	-
Connectivity	SmartShare(Movie/Photo/Music)	-	-	-
	Smart Mirroring (Mobile to TV)	-	-	-
Management	Remote diagnostics/ Self diagnostics	Remote diagnostics	Remote diagnostics	Remote diagnostics
	HDMI-CEC	-	-	-
Usability	Soft AP	-	-	-
	DRM	ProIdiom	ProIdiom	ProIdiom
Security	Welcome Screen/Welcome Video	*/	*/	*/
	Lock Mode	-	-	-
Interface	HDMI In	2	2	1
	USB	1(3.0), 2(2.0)	2	2
Rear	Headphone Out (3.5mm Phone Jack)	-	-	-
	RS-232C-sub 9pin	1	1	1
Power	Voltage, Hz	100~240V, 50-60Hz	110~240V, 50-60Hz	100~240V, 50-60Hz
	Typical(Watts)	49": 128.3 55": 140.9 60": 169	42": 95 47": 100 55": 130	32": 62.8 39": 75.5 43": 84.2 47": 85.2 55": 100.1
Dimension	Stand-by	0.3W	0.3W	0.3W
	Set Size (With Stand, WxHxD, mm)	49": 1,095.1 x 649.5 x 51.3 55": 1,234.8 x 727.3 x 50.8 60": 1,342.6 x 788 x 52.8	42": 949 x 560 x 55.1 47": 1,061 x 623 x 55.1 55": 1,231 x 718 x 55.1	32": 734 x 437 x 55.3 40": 911 x 528 x 55.3 43": 973 x 573 x 37(SPK 55.1) 49": 1,106 x 647 x 37(SPK 55.1) 55": 1,242 x 724 x 37(SPK 55.1)
Tool	Swivel (angle)	-	-	*(for LY761H)
	VEESA Compatibility	300 X 300	400 X 400	32"/39" : 200 X 200 49"/55" : 300 X 300
Standard Approval	Safety	CB, CU TR	CB, CU TR	CB
	Environment	CE	CE	CE
Eco	ErP Class	A+	A+(42"/47"/55"), A++(60")	A+(32"/39"/42"/49"/55")
	On Power Consumption (IEC62097 Edition 2) (W)	49": 65 55": 79 60": 94	42"/47": 43 55": 60	32": 41 39": 45 43": 55 47": 56 55": 64
Eco	Stand By (W)	0.3	0.3	0.3
	Luminance Ratio (%)	65	65	65
Eco	Mercury Content (mg)	0	0	0
	Average Annual Consumption (kWh)	49": 95 55": 115 60": 137	42"/47": 72 55": 99	32": 80 39": 85 42": 93 47": 93 55": 124

EU

Series	LX310C	LX300C	LY540M	LX540S	LX530S	
Model Info						
Region	EU	EU	EU	EU	EU	
Size	43"60"	32"	22"47"/28"	43"/49"/55"/60"	42"	
Analog	PAL/SECAM	PAL/SECAM	PAL/SECAM	PAL/SECAM	PAL/SECAM	
Digital	DVB-T/C	DVB-T/C	DVB-T2/C/S2	DVB-T2/C/S2	DVB-T2/C/S2	
Video						
Resolution	1920 x 1080 (FHD)	1366 x 768 (HD)	1366 x 768 (HD)	1920 x 1080 (FHD)	1920 x 1080 (FHD)	
Audio						
Audio Output	5W + 5W	3W + 3W	5W + 5W	10W + 10W	10W + 10W	
Feature						
Pro-Centric	Type(Smart/Value/Lite) Streaming Type (P/P/F) RF (1/2Tuner) HCAP (GEM/FLASH/HTML)	- - - -	Value IP/PF 1 Tuner GEM/FLASH	- - - -	- - - -	
Smart	Application Web Browser	- -	- -	- -	- -	
Connectivity	SmartShare(Movie/Photo/Music) WiDi (PC to TV) Smart Mirroring (Mobile to TV) WiFi Direct MHL	- - - -	- - - -	- - - -	- - - -	
Management	Remote diagnostics/ Self diagnostics EzManager	Self diagnostics -	Self diagnostics -	Self diagnostics -	Self diagnostics -	
Interactivity	HDMI-CEC HTNG-CEC	- -	- -	- -	- -	
Usability	Built-in WiFi Soft AP	- -	- -	- -	- -	
Security	DRM	-	-	-	-	
Welcome Screen/Welcome Video	*/	*/	*/	*/	*/	
Lock Mode	-	-	-	-	-	
One Channel Map / Logical Channel Map	-	-	-	-	-	
Multi IR Code	-	-	-	-	-	
Hotel Mode / Public Display Mode	-	-	-	-	-	
Instant ON	-	-	-	-	-	
USB Cloning	-	-	-	-	-	
IR Out	*(RS-232C)	*(RS-232C)	*(RS-232C, HDM)	*(RS-232C)	*(RS-232C)	
USB Auto Playback	-	-	*(RS-232C, 5V/2A or 12V/1A)	-	-	
External Power	-	-	*(RS-232C, 5V/2A or 12V/1A)	-	-	
External Speaker Out	-	-	-	(Phone Jack, W/ Component)	(Phone Jack, W/ Component)	
RJP Interface	*(RS232C, HDMI CEC)	*(RS232C, HDMI CEC)	-	-	-	
Auto Off / Auto Sleep	-	-	-	-	-	
Smart Energy Saving	-	-	-	-	-	
Anti-theft System	-	-	Kensington Lock	Kensington Lock	Kensington Lock	
Interface						
Side	HDMI In	1	-	1	1	
	USB	1	-	1	2	
	CI Slot	1	1	1	1	
	Headphone Out	1	-	1	1	
	AV In	-	-	-	-	
	RF In	1	1	2	1	
	AV In(Composite)	-	-	-	-	
	Component In (Y, Pb, Pr) + Audio(L/R)	1(Phone Jack), 1(Phone Jack)	1(Phone Jack), 1(Phone Jack)	2(Video 1, Audio 1)	1(Phone Jack)	
	Digital Audio Out (Optical)	1(Optical)	-	1(Optical)	1(Optical)	
	RGB In (D-sub 15pin)	1	-	-	1	
	Clock Interface (D-sub 15pin)	-	-	-	-	
	PC Audio Input	1(Phone Jack, Used w/Component in)	1(Phone Jack, Used w/Component in)	-	1(Phone Jack, Commonly used w/AV)	
Rear	USB	-	1	-	-	
	Headphone Out (3.5mm Phone Jack)	-	1	-	-	
	RS-232C(D-sub 9pin)	1	1	1	1	
	HDMI In	1	1	1	1	
	LAN Port	-	-	1	1	
	Full Scart	1	1	1	1	
	MPI Port(RJ12)	-	-	-	-	
	RJP interface (RJ45)	-	-	-	-	
	Ext SPK out (3.5mm Phone Jack)	-	-	2(Spk-out 1, Vol. Control 1)	1	
	Power					
	Voltage, Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz
	Typical(Watts)	43": 57.3 49": 65.8	27.55	22": 35 28": 40	43": 79 49": 80.8 55": 95.4 60": 136	84.9W
Stand-by	0.3W	0.3W	0.5W	0.3W	0.3W	
Dimension						
Set Size (W/O Stand, WxHxD, mm)	43": 971 x 575 x 39.9(SPK: 58.7) 49": 1,103 x 650 x 39.9(SPK: 58.7)	734 x 474 x 66.5(SPK: 71)	22": 507.6 x 315.7 x 63.1 28": 641.5 x 395.8 x 57.6	43": 973 x 573 x 37(SPK: 55.1) 49": 1,106 x 647 x 37(SPK: 55.1) 55": 1,242 x 724 x 39(SPK: 55.1) 60": 1,363 x 792 x 39(SPK: 57.1)	42": 961 X 567 X 55.5	
Set Size (With Stand, WxHxD, mm)	43": 971 x 624 x 198 49": 1,103 x 696 x 198	734 x 474 x 172	22": 507.6 x 355.9 x 140.5 28": 641.5 x 431.9 x 170	43": 973 x 625 x 193 49": 1,106 x 697.5 x 220 55": 1,242 x 774 x 220 60": 1,363 x 844 x 234	42": 961 X 610 X 218	
Set Weight (With Stand, Set, kg)	43": 9.8 49": 13.4	4.7	22": 3.1 28": 4.8	43": 12.7 49": 17.6 55": 20.9 60": 29.3	42": 9.5	
Tool						
Swivel (angle)	-	-	-	-	-	
VESA Compatibility	43": 200 X 200 49": 300 X 300	TBD	22": 75 X 75 28": 100 X 100	43": 200 X 200 49"/55"/60": 300 x 300	400 X 400	
Standard Approval						
Safety	CB	CB	CB	CB	CB, CU TR	
Environment	CE	CE	ROHS	CE	CE	
Etc.	ROHS, ErP, Eco flower	ROHS, ErP, Eco flower	ErP, Eco flower	ROHS, ErP, Eco flower(EU only)	ROHS, ErP, Eco flower(EU only)	
Eco	ErP Class	43"/49": A++	A+	17(22"), 21(28")	45.8	
	On Power Consumption (IEC62097 Edition 2) (W)	43": 36 49": 43	25	43": 51 49": 53 55": 60 60": 93	-	
	Stand By (W)	0.3	0.3	0.3	0.3	0.3
	Luminance Ratio (%)	65	65	65	65	65
	Mercury Content (mg)	0	0	0	0	0
	Presence of Lead	Yes	Yes	Yes	-	-
	Average Annual Consumption (kh)	43": 53 49": 63	37	25(22"), 31(28")	43": 74 49": 77 55": 88 60": 136	76

CIS

Series	UX960H	LY960H	LX761H	
Model Info				
Region	CIS	CIS	CIS	
Size	49"/55"/60"	42"/47"/55"/60"	32"/40"/43"/49"/55"	
Analog	PAL/SECAM	PAL/SECAM	PAL/SECAM	
Digital	DVB-T2/C/S2	DVB-T2/C/S2	DVB-T2/C/S2	
Video				
Resolution	3840 x 2160 (UH-D)	1920 x 1080 (FHD)	1920 x 1080 (FHD)	
Audio				
Audio Output	10W + 10W	10W + 10W	10W + 10W	
Feature				
Pro-Centric	Type(Smart/Value/Lite) Streaming Type (P/P/F) RF (1/2Tuner) HCAP (GEM/FLASH/HTML)	Smart IP/PF 1 Tuner GEM / Flash / HTML5	Smart IP/PF 1 Tuner GEM / Flash / HTML5	
Smart	Application Web Browser	- -	- -	
Connectivity	SmartShare(Movie/Photo/Music) WiDi (PC to TV) Smart Mirroring (Mobile to TV) WiFi Direct MHL	- - - -	- - - -	
Management	Remote diagnostics/ Self diagnostics EzManager	Remote diagnostics -	Remote diagnostics -	
Interactivity	HDMI-CEC HTNG-CEC	- -	- -	
Usability	Built-in WiFi Soft AP	- -	- -	
Security	DRM	Proddiom	Proddiom	
Welcome Screen/Welcome Video	*/	*/	*/	
Lock Mode	-	-	-	
One Channel Map / Logical Channel Map	-	-	-	
Multi IR Code	-	-	-	
Hotel Mode / Public Display Mode	-	-	-	
Instant ON	-	-	-	
USB Cloning	-	-	-	
IR Out	*(RS-232C, HDM)	*(RS-232C, HDM)	*(RS-232C, HDM)	
USB Auto Playback	-	-	-	
External Power	*(RS-232C, 5V/2A or 12V/1A) *Exclusively selectable	*(RS-232C, 5V/2A or 12V/1A) *Exclusively selectable	*(RS-232C, 5V/2A or 12V/1A) *Exclusively selectable	
External Speaker Out	*(Int / Ext Variable/Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 1W with 8Ω)	*(Int / Ext Variable/Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 1W with 8Ω)	*(Int / Ext Variable/Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 1W with 8Ω)	
RJP Interface	*(RS232C, HDMI CEC)	*(RS232C, HDMI CEC)	*(RS232C, HDMI CEC)	
Auto Off / Auto Sleep	-	-	-	
Smart Energy Saving	-	-	-	
Anti-theft System	-	Kensington Lock	Kensington Lock, Credenza/Security Screw Hole	
Interface				
Side	HDMI In	2	1	
	USB	1(3.0), 2(2.0)	2	
	CI Slot	1	1	
	Headphone Out	1	1	
	AV In	-	-	
	RF In	2	2	
	AV In(Composite)	-	-	
	Component In (Y, Pb, Pr) + Audio(L/R)	-	-	
	Digital Audio Out (Optical)	1(Optical)	1(Optical)	
	RGB In (D-sub 15pin)	-	-	
	Clock Interface (D-sub 15pin)	-	-	
	PC Audio Input	1(Optical)	1(Optical)	
Rear	USB	-	-	
	Headphone Out (3.5mm Phone Jack)	-	-	
	RS-232C(D-sub 9pin)	-	-	
	HDMI In	1	1	
	LAN Port	1	1	
	Full Scart	2	2	
	MPI Port(RJ12)	1	1	
	RJP interface (RJ45)	-	-	
	Ext SPK out (3.5mm Phone Jack)	2(Spk-out 1, Vol. Control 1)	2(Spk-out 1, Vol. Control 1)	
	Power			
	Voltage, Hz	100-240V, 50-60Hz	100-240V, 50-60Hz	100-240V, 50-60Hz
	Typical(Watts)	49": 128.3 55": 140.9 60": 169	42": 95 47": 100 55": 130 60": 140	32": 62.8 40": 82.1 43": 84.2 49": 86.2 55": 100.1
Stand-by	0.3W	0.3W	0.3W	
Dimension				
Set Size (W/O Stand, WxHxD, mm)	49": 1,095.1 x 649.5 x 51.3 55": 1,234.8 x 727.3 x 50.8 60": 1,342.6 x 786 x 52.8	42": 949 x 500 x 55.1 47": 1,061 x 623 x 55.1 55": 1,231 x 718 x 55.1 60": 1,338.4 x 778.8 x 58.1	32": 734 x 438 x 55.3 40": 911 x 528 x 55.3 43": 973 x 573 x 37(SPK: 55.1) 49": 1,106 x 647 x 37(SPK: 55.1) 55": 1,242 x 724 x 37(SPK: 55.1)	
Set Size (With Stand, WxHxD, mm)	49": 1,095.1 x 703.6 x 260.6 55": 1,234.8 x 781.6 x 260.6 60": 1,342.6 x 840.3 x 276.1	42": 949 x 611 x 218 47": 1,061 x 677 x 247 55": 1,231 x 772 x 247 60": 1,338.4 x 837 x 273.5	32": 734 x 489 x 282 40": 911 x 576 x 282 43": 973 x 624 x 325 49": 1,106 x 701 x 325 55": 1,242 x 780 x 325	
Set Weight (With Stand, Set, kg)	49": 17.3 55": 20.4 60": 25.4	42": 10.3 47": 13.2 55": 18.9 60": 21.8	32": 8.2 40": 10.4 43": 13.6 49": 17.8 55": 21.1	
Tool				
Swivel (angle)	-	-	-	
VESA Compatibility	300 X 300	400 X 400	32"/43": 200 X 200 49"/55": 300 X 300	
Standard Approval				
Safety	CB, CU TR	CB, CU TR	CB, CU TR	
Environment	CE	CE	CE	
Etc.	ROHS, ErP	ROHS, ErP	ROHS, ErP	

CIS

Series	LY750H	LX541H	LX341C	LF551C	
Model Info					
Region	CIS	CIS	CIS	CIS	
Size	32"/42"/47"/55"	32"/40"/43"/49"/55"	32"/43"/49"/55"/60"/65"	28"/49"/55"/60"	
Analog	PAL/SECAM	PAL/SECAM	PAL/SECAM	PAL/SECAM	
Digital	DVB-T/C	DVB-T2/C/S2	DVB-T2/C/S2	DVB-T2/C/S2	
Video					
Resolution	1920 x 1080 (FHD)	1920 x 1080 (FHD)	1920 x 1080 (FHD)	42"/49": 1920 x 1080 (FHD) 28"/49": 1280 x 720 (HD)	
Audio					
Audio Output	10W + 10W	40"/43"/49"/55": 10W + 10W 32": 5W + 5W	43"/49"/55"/60"/65": 10W + 10W 32": 5W + 5W	5W + 5W	
Feature					
Pro-Centric	Type(Smart/Value/Lite)	Smart	Value	-	
	Streaming Type (P/RF)	IP/RF	RF	-	
Smart	RF (1/2 Tuner)	1 Tuner	1 Tuner	-	
	HGAP (GEM/FLASH/HTML)	GEM / Flash / HTML5	GEM / Flash	GEM/FLASH	
Connectivity	Commercial Smart Home	-	-	-	
	Application	-	-	-	
Management	Web Browser	-	-	-	
	SmartShare(Movie/Photo/Music)	-	-	-	
Interactivity	WDI (PC to TV)	-	-	-	
	Smart Mirroring (Mobile to TV)	-	-	-	
Usability	WiFi Direct	-	-	-	
	MHL	-	-	-	
Security	Remote diagnostics/ Self diagnostics	Remote diagnostics	Self diagnostics	Self diagnostics	
	EdManager	-	-	-	
Interface	HDMI-CEC	-	-	-	
	HTNG-CEC	-	-	-	
Usability	Built-In WiFi	-	-	-	
	Soft AP	-	-	-	
Security	DRM	-	-	-	
	Welcome Screen/Welcome Video	-	-	-	
Lock Mode	One Channel Map / Logical Channel Map	-	-	-	
	Multi IR Code	-	-	-	
RJP Interface	Hotel Mode / Public Display Mode	-	-	-	
	Instant ON	-	-	-	
USB Cloning	USB Cloning	-	-	-	
	IR Out	-	-	-	
External Power	USB Auto Playback	-	-	-	
	External Power	*[RS-232C, 5V/2A or 12V/1A] Exclusively selectable	*[RS-232C, 5V/2A or 12V/1A] Exclusively selectable	-	
RJP Interface	Auto Off / Auto Sleep	-	-	-	
	Smart Energy Saving	-	-	-	
Anti-theft System	Anti-theft System	-	-	-	
	Anti-theft System	Kensington Lock	Kensington Lock, Credenza/Lock down plate	Kensington Lock	
Interface					
Side	HDMI In	1	2	1	1 (except 28")
	USB	2	1	1	1
	CI Slot	1	1	1	1
	Headphone Out	1	1	1	1
	AV in	-	-	-	1 (except 28")
	RF In	1	1	1	1
	AV In(Composite)	-	-	-	-
	Component In (Y, Pb/Pz) + Audio(L,R)	-	1(Phone jack);Component/DVI/PC Audio	1(Phone jack);Component/DVI/PC Audio	1(Phone jack);Component/DVI/PC Audio
	Digital Audio Out (Optical)	1	1(Optical)	1(Optical)	1(Optical)
	RGB In (D-sub 15pin)	-	-	-	-
Rear	Clock Interface (D-sub 15pin)	1	1	-	-
	PC Audio Input	-	-	1(Phone Jack, Component)	-
	USB	-	-	-	-
	Headphone Out (3.5mm Phone Jack)	-	-	1	-
	RS-232C(D-sub 9pin)	1	1	1	1
	HDMI In	1	1	1	1(Only for 28")
	LAN(RJ45)	2	1	1	1(2 for 28")
	Full Scart	1	1	1	-
	MPI Port(RJ12)	-	-	-	-
	RJP interface (RJ45)	-	-	-	-
Power	Ext SPK out (3.5mm Phone Jack)	2(Spk-out 1, Vol. Control 1)	2(Spk-out 1, Vol. Control 1)	1(Spk-out 1)	-
	Voltage, Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz
Typical(Watts)	Typical(Watts)	32": 75 42": 110 47": 120 55": 140	32": 59.6 40": 75.5 43": 77.2 49": 80.2 55": 92.8	32": 59.4 43": 78 49": 77.6 55": 91.1 60": 129.9 65": 119.9	28": 64.2 32": 52.8 42": 103 49": 107.4
	Stand-by	0.3W	0.3W	0.3W	0.3W
Dimension	Set Size (W/O Stand, WxHxD, mm)	32": 732 x 431 x 55.5 42": 961 x 561 x 55.5 47": 1,073 x 623 x 55.8 55": 1,243 x 719 x 56.8	32": 734 x 438 x 55.3 40": 911 x 528 x 55.3 43": 973 x 573 x 37(SPK 55.1) 49": 1,106 x 647 x 37(SPK 55.1) 55": 1,242 x 724 x 37(SPK 55.1) 60": 1,363 x 792 x 39(SPK 57.1) 65": 1,461 x 848 x 39 (SPK 57.3)	32": 734 x 438 x 55.3 43": 973 x 573 x 37(SPK 55.1) 49": 1,106 x 647 x 37(SPK 55.1) 55": 1,242 x 724 x 37(SPK 55.1) 60": 1,363 x 792 x 39(SPK 57.1) 65": 1,461 x 848 x 39 (SPK 57.3)	28": 641.5 X 395.8 X 57.6 32": 731 x 442 x 56.5 42": 959 X 570 X 56.2 49": 1,105 X 652 X 56.5
	Set Weight (With Stand, Set, kg)	32": 732 x 481 x 207 42": 961 x 610 x 218 47": 1,073 x 676 x 255 55": 1,243 x 772 x 255	32": 734 x 489 x 282 40": 911 x 576 x 282 43": 973 x 624 x 325 49": 1,197 x 697.5 x 220 55": 1,242 x 774 x 220 60": 1,363 x 844 x 294 65": 1,461 x 899 x 294	32": 734 x 483 x 154 43": 973 x 624 x 325 49": 1,197 x 697.5 x 220 55": 1,242 x 774 x 220 60": 1,363 x 844 x 294 65": 1,461 x 899 x 294	28": 641.5 X 432 X 170 32": 731 x 480 x 208 42": 959 x 611 x 218 49": 1,105 x 694 x 247
Tool	Swivel (angle)	-	-	-	-
	VESA Compatibility	32": 200 X 200, 42"/47"/55": 400 X 400	32"/40"/43": 200 X 200 49"/55": 300 X 300	32"/43": 200 X 200 49"/55"/60"/65": 300 X 300	28": 100 X 100, 32": 200 X 200, 42"/49": 400 X 400
Standard Approval					
Safety	CB , CU TR	CB , CU TR	CB , CU TR	CB , CU TR	
Environment	CE	CE	CE	CE	
Etc.	ROHS, EP	ROHS, EP	ROHS, EP	ROHS, EP	

Series	LX318C	LX308C	LX540S	LX530S
Model Info				
Region	CIS	CIS	CIS	CIS
Size	43"/49"	32H"	43"/49"/55"/60"	42"
Analog	PAL/SECAM	PAL/SECAM	PAL/SECAM	PAL/SECAM
Digital	DVB-T2/C/S2	DVB-T2/C/S2	DVB-T2/C/S2	DVB-T2/C/S2
Video				
Resolution	1920 x 1080 (FHD)	1366 x 768 (HD)	1920 x 1080 (FHD)	1920 x 1080 (FHD)
Audio				
Audio Output	5W + 5W	3W + 3W	10W + 10W	10W + 10W
Feature				
Pro-Centric	Type(Smart/Value/Lite)	-	-	-
	Streaming Type (P/RF)	-	-	-
Smart	RF (1/2 Tuner)	-	-	-
	HGAP (GEM/FLASH/HTML)	GEM/FLASH	GEM/FLASH	-
Connectivity	Commercial Smart Home	-	-	-
	Application	-	-	-
Management	Web Browser	-	-	-
	SmartShare(Movie/Photo/Music)	-	-	-
Interactivity	WDI (PC to TV)	-	-	-
	Smart Mirroring (Mobile to TV)	-	-	-
Usability	WiFi Direct	-	-	-
	MHL	-	-	-
Security	Remote diagnostics/ Self diagnostics	Self diagnostics	Self diagnostics	Self diagnostics
	EdManager	-	-	-
Interface	HDMI-CEC	-	-	-
	HTNG-CEC	-	-	-
Usability	Built-In WiFi	-	-	-
	Soft AP	-	-	-
Security	DRM	-	-	-
	Welcome Screen/Welcome Video	-	-	-
Lock Mode	One Channel Map / Logical Channel Map	-	-	-
	Multi IR Code	-	-	-
RJP Interface	Hotel Mode / Public Display Mode	-	-	-
	Instant ON	-	-	-
USB Cloning	USB Cloning	-	-	-
	IR Out	-	-	-
External Power	USB Auto Playback	-	-	-
	External Power	-	-	-
RJP Interface	Auto Off / Auto Sleep	-	-	-
	Smart Energy Saving	-	-	-
Anti-theft System	Anti-theft System	-	-	-
	Anti-theft System	-	-	-
Side	HDMI In	1	-	1
	USB	1	-	2
	CI Slot	1	1	1
	Headphone Out	1	-	1
	AV in	-	-	-
	RF In	2	2	1
	AV In(Composite)	-	-	-
	Component In (Y, Pb/Pz) + Audio(L,R)	1(Phone jack);Component/DW/ Audio	1(Phone Jack)	1(Phone Jack)
	Digital Audio Out (Optical)	1(Optical)	-	1(Optical)
	RGB In (D-sub 15pin)	-	-	1
Rear	Clock Interface (D-sub 15pin)	-	-	-
	PC Audio Input	1(Phone Jack, Component)	1(Phone Jack, Component)	1(Phone Jack, Commonly used w/AV)
	USB	-	1	-
	Headphone Out (3.5mm Phone Jack)	-	1	-
	RS-232C(D-sub 9pin)	1	1	1
	HDMI In	1	1	1
	LAN(RJ45)	-	-	1
	Full Scart	1	1	1
	MPI Port(RJ12)	-	-	-
	RJP interface (RJ45)	-	-	-
Power	Ext SPK out (3.5mm Phone Jack)	-	-	1
	Voltage, Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz
Typical(Watts)	Typical(Watts)	43": 57.3 49": 65.8	27.55	43": 79 49": 80.8 55": 95.4 60": 136
	Stand-by	0.3W	0.3W	0.3W
Dimension	Set Size (W/O Stand, WxHxD, mm)	43": 971 x 575 x 39.9(SPK 58.7) 49": 1,103 x 650 x 39.9(SPK 58.7)	734 x 474 x 86.5(SPK 71)	43": 973 x 573 x 37(SPK 55.1) 49": 1,106 x 647 x 37(SPK 55.1) 55": 1,242 x 724 x 37(SPK 55.1) 60": 1,363 x 792 x 39(SPK 57.1)
	Set Weight (With Stand, Set, kg)	43": 9.8 49": 13.4	4.7	43": 12.7 49": 17.6 55": 20.9 60": 29.3
Tool	Swivel (angle)	-	-	-
	VESA Compatibility	43": 200 X 200 49": 300 X 300	TBD	43": 200 X 200 49"/55"/60": 300 X 300
Standard Approval				
Safety	CB	CB	CB	CB , CU TR
Environment	CE	CE	CE	CE
Etc.	ROHS, EP	ROHS, EP	ROHS, EP	ROHS, EP

ASIA

Table with columns: Series, Model Info, Region, Size, Analog, Digital, Video, Audio, Feature, Interface, Power, Dimension, Tool, Standard Approval. Sub-columns include LY960H, LY755H, LX761H, LX545H.

Table with columns: Series, Model Info, Region, Size, Analog, Digital, Video, Audio, Feature, Interface, Power, Dimension, Tool, Standard Approval. Sub-columns include LX541H, LX531H, LX530H, UX340C.

ASIA

Series	LX341C	LX330C	LY330C	LX310C	
Model Info					
Region	ASIA	ASIA	ASIA	ASIA	
Size	43"/49"/55"/60"/65"	32"/42"	22"/28"	43"/49"	
Analog	PAL/NTSC-M	PAL/NTSC-M	PAL/NTSC-M	PAL/NTSC-M	
Digital	DVB-T2/C (Varied by region)	DVB-T2/C (Varied by region)	DVB-T/C (Varied by region)	DVB-T2/C (Varied by region)	
Video					
Resolution	1920 x 1080 (FHD)	42" : 1920 x 1080 (FHD) 32" : 1366 x 768 (HD)	1366 x 768 (HD)	1920 x 1080 (FHD)	
Audio					
Audio Output	10W + 10W	10W + 10W	5W + 5W	5W + 5W	
Feature					
Pro-Centric	Type(Smart/Value/Lite) Streaming Type (P/P/RF) RF (1/2 Tuner) HGAP (GEM/FLASH/HTML)	- - - -	- - - -	- - - -	
Smart	Commercial Smart Home Application Web Browser	- - -	- - -	- - -	
Connectivity	SmartShare(Movie/Photo/Music) WiD (PC to TV) Smart Mirroring (Mobile to TV) WiFi Direct MHL	- - - - -	- - - - -	- - - - -	
Management	Remote diagnostics/ Self diagnostics	Self diagnostics	Self diagnostics	Self diagnostics	
Interactivity	EdManager HDMI-CEC HTNG-CEC	- - -	- - -	- - -	
Usability	Built-In WiFi Soft AP	- -	- -	- -	
Security	DRM	-	-	-	
Welcome Screen/Welcome Video	•/•	•/•	•/•	•/•	
Lock Mode	•	•	•	•	
One Channel Map / Logical Channel Map	•	•	•	•	
Multi IR Code	•	•	•	•	
Hotel Mode / Public Display Mode	•	•	•	•	
Instant ON	•	•	•	•	
USB Cloning	•	•	•	•	
IR Out	•(RS-232C)	•(RS-232C)	•(RS-232C)	•(RS-232C)	
USB Auto Playback	•	•	•	•	
External Power	-	-	-	-	
External Speaker Out	•(Int/Fixed, 3.5mm, Stereo, Single ended Type(GND,L/R), 1W with 8Ω)	•(Int/Fixed, 3.5mm, Stereo, Single ended Type(GND,L/R), 1W with 8Ω)	•(Int/Fixed, 3.5mm, Stereo, Single ended Type(GND,L/R), 1W with 8Ω)	-	
RJP Interface	•(RS232C, HDMI CEC)	•(RS232C, HDMI CEC)	•(RS232C, HDMI CEC)	•(RS232C, HDMI CEC)	
Auto Off / Auto Sleep	•	•	•	•	
Smart Energy Saving	•	•	•	•	
Anti-theft System	Kensington Lock	Kensington Lock	Kensington Lock	-	
Interface					
Side	HDMI In	1	1	1	
	USB	2	2	2	
	CI Slot	-	-	-	
	Headphone Out	1	1	1	
Rear	AV In	1	1	1	
	AV In(Composite)	1	1	1	
	Component In (Y, Pb, Pr) + Audio(L/R)	1(Commonly used w/AV)	1(Commonly used w/AV)	1(Commonly used w/AV)	
	Digital Audio Out (Optical)	1(Optical)	1(Optical)	1(Optical)	
	RGB In (D-sub 15pin)	1	1	1	
	Clock Interface (D-sub 15pin)	-	-	-	
	PC Audio Input	1(Commonly used w/AV)	1(Commonly used w/AV)	1(Commonly used w/AV)	
	USB	-	-	-	
	Headphone Out (3.5mm Phone Jack)	-	-	-	
	RS-232C(D-sub 9pin)	1	1	1	
Power	Voltage, Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	
	Typical(Watts)	43" : 83.9 49" : 83.5 55" : 84.0 60" : 131.2 65" : 122.9	32" : 59.0 42" : 83.7	22" : 29.0 28" : 36.0	43" : 60.0 49" : 71.6
	Stand-by	43/49/60" : 0.22W 55" : 0.20W 65" : 0.23W	32" : 0.25W 42" : 0.26W	22" : 0.20W 28" : 0.21W	43" : 0.18W 49" : 0.26W
	Set Size (W/O Stand, WxHxD, mm)	43": 973 x 573 x 37(SPK 55.1) 49": 1,106 x 647 x 37(SPK 55.1) 55": 1,242 x 724 x 37(SPK 55.1) 60": 1,363 x 792 x 39(SPK 57.1) 65": 1,461 x 848 x 39(SPK 57.3)	32": 732 x 431 x 55.5 42": 961 x 567 x 55.5	22": 507.6 x 315.7 x 53.1 28": 641.5 x 395.8 x 57.6	43": 971 x 624 x 39.9(SPK 58.7) 49": 1,103 x 698 x 39.9(SPK 58.7)
	Set Size (With Stand, WxHxD, mm)	43": 973 x 625 x 193 49": 1,106 x 697 x 220 55": 1,242 x 774 x 220 60": 1,363 x 844 x 294 65": 1,461 x 899 x 294	32": 732 x 481 x 207 42": 961 x 612 x 218	Stand Trapezoid type (India only) 22": 507.6 x 355.9 x 140.5 28": 641.5 x 431.9 x 170 22": 507.6 x 355.9 x 135.8 28": 641.5 x 432 x 170	43": 971 x 624 x 198 49": 1,103 x 698 x 198
	Set Weight (With Stand, Set, kg)	43" : 12.7 49" : 17.6 55" : 21.1 60" : 29.3 65" : 34.0	32" : 6.2 42" : 9.5	22" : 3.1 28" : 4.5	43" : 9.8 49" : 13.4
	Swivel (angle)	-	-	-	-
	VESA Compatibility	43" : 200 X 200 49"/55"/60"/65" : 300 X 300	32" : 200 X 200 42" : 400 X 400	22" : 75 X 75 28" : 100 X 100	43" : 200 X 200 49" : 300 X 300
	Standard Approval				
	Safety	CB, BIS, SIRIM, TISI, BPS, PSB, SNI	CB, BIS, SIRIM, TISI, BPS, PSB, SNI	CB, BIS, SIRIM, TISI, BPS	CB, BIS, SIRIM, TISI, BPS, PSB, SNI
Environment	CISPR	CISPR	CISPR	CISPR	
Etc.	MEPS, Tick, EE, CFI, BEE, Freeview	MEPS, Tick, EE, CFI, BEE, Freeview	MEPS, Tick, BEE, EE, CFI	MEPS, Tick, EE, CFI, BEE, Freeview	

Series	LX300C	LX40S	LX30S	
Model Info				
Region	ASIA	ASIA	ASIA	
Size	32"	43"/49"/55"/60"	32"/42"	
Analog	PAL/NTSC-M	PAL/NTSC-M	PAL/NTSC-M	
Digital	DVB-T2/C (Varied by region)	DVB-T2/C (Varied by region)	DVB-T2/C (Varied by region)	
Video				
Resolution	1366 x 768 (HD)	1920 x 1080 (FHD)	42" : 1920 x 1080 (FHD) 32" : 1366 x 768 (HD)	
Audio				
Audio Output	3W + 3W	10W + 10W	10W + 10W	
Feature				
Pro-Centric	Type(Smart/Value/Lite) Streaming Type (P/P/RF) RF (1/2 Tuner) HGAP (GEM/FLASH/HTML)	- - - -	- - - -	
Smart	Commercial Smart Home Application Web Browser	- - -	- - -	
Connectivity	SmartShare(Movie/Photo/Music) WiD (PC to TV) Smart Mirroring (Mobile to TV) WiFi Direct MHL	- - - - -	- - - - -	
Management	Remote diagnostics/ Self diagnostics	Self diagnostics	Self diagnostics	
Interactivity	EdManager HDMI-CEC HTNG-CEC	- - -	- - -	
Usability	Built-In WiFi Soft AP	- -	- -	
Security	DRM	-	-	
Welcome Screen/Welcome Video	•/•	•/•	•/•	
Lock Mode	•	•	•	
One Channel Map / Logical Channel Map	•	•	•	
Multi IR Code	•	•	•	
Hotel Mode / Public Display Mode	•	•	•	
Instant ON	•	•	•	
USB Cloning	•	•	•	
IR Out	•(RS-232C)	•(RS-232C)	•(RS-232C)	
USB Auto Playback	•	•	•	
External Power	-	-	-	
External Speaker Out	-	•(Int/Fixed, 3.5mm, Stereo, Single ended Type(GND,L/R), 1W with 8Ω)	•(Int/Fixed, 3.5mm, Stereo, Single ended Type(GND,L/R), 1W with 8Ω)	
RJP Interface	•(RS232C, HDMI CEC)	•(RS232C, HDMI CEC)	•(RS232C, HDMI CEC)	
Auto Off / Auto Sleep	•	•	•	
Smart Energy Saving	•	•	•	
Anti-theft System	-	Kensington Lock	Kensington Lock	
Interface				
Side	HDMI In	1	1	
	USB	2	2	
	CI Slot	-	-	
	Headphone Out	1	1	
Rear	AV In	1	1	
	AV In(Composite)	1(Commonly Used w/ AV)	1	
	Component In (Y, Pb, Pr) + Audio(L/R)	1	1(Commonly used w/AV)	
	Digital Audio Out (Optical)	1(Optical)	1(Optical)	
	RGB In (D-sub 15pin)	1	1	
	Clock Interface (D-sub 15pin)	-	-	
	PC Audio Input	1(Commonly used w/AV)	1(Commonly used w/AV)	
	USB	1	1	
	Headphone Out (3.5mm Phone Jack)	-	-	
	RS-232C(D-sub 9pin)	1	1	
Power	Voltage, Hz	100-240V, 50-60Hz	100-240V, 50-60Hz	
	Typical(Watts)	27.17	43" : 84.6 49" : 83.5 55" : 84.0 60" : 131.2	32" : 59.0 42" : 83.7
	Stand-by	0.20W	43" : 0.20W 49" : 0.22W 55" : 0.20W 60" : 0.22W	32" : 0.25W 42" : 0.26W
	Set Size (W/O Stand, WxHxD, mm)	32" : 734 x 474 x 66.5 (SPK 71)	43": 973 x 573 x 37(SPK 55.1) 49": 1,106 x 647 x 37(SPK 55.1) 55": 1,242 x 724 x 37(SPK 55.1) 60": 1,363 x 792 x 39(SPK 57.1)	32": 732 x 431 x 55.5 42": 961 x 567 x 55.5
	Set Size (With Stand, WxHxD, mm)	32" : 734 x 474 x 172	43": 973 x 625 x 193 49": 1,106 x 697.5 x 220 55": 1,242 x 774 x 220 60": 1,363 x 844 x 294	32": 732 x 481 x 207 42": 961 x 610 x 218
	Set Weight (With Stand, Set, kg)	32" : 4.7	43" : 12.7 49" : 17.6 55" : 20.9 60" : 29.3	32" : 6.2 42" : 9.5
	Swivel (angle)	-	-	-
	VESA Compatibility	200 X 200	43" : 200 X 200 49"/55"/60" : 300 X 300	32" : 200 X 200 42" : 400 X 400
	Standard Approval			
	Safety	CB, BIS, SIRIM, TISI, BPS, PSB, SNI	CB, BIS, SIRIM, TISI, BPS, PSB, SNI	CB, BIS, SIRIM, TISI, BPS, PSB, SNI
Environment	CISPR	CISPR	CISPR	
Etc.	MEPS, Tick, EE, CFI, BEE, Freeview	MEPS, Tick, EE, CFI, BEE, Freeview	MEPS, Tick, EE, CFI, BEE, Freeview	

CHINA

Series	LX761H	LX341H	LX330H
Model Info			
Region	CHINA	CHINA	CHINA
Size	43"/49"/55"/60"	43"/49"/55"	32"/42"
Analog	PAL-I, PAL/SECAM BG/DK, NTSC M/AV ONLY	PAL-I, PAL/SECAM BG/DK, NTSC M/AV ONLY	
Digital	DTMB/DVB-C	DTMB/DVB-C	DTMB/DVB-C
Video			
Resolution	1920 x 1080 (FHD)	1920 x 1080 (FHD)	42": 1920 x 1080 (FHD) 32H": 1368 X 768 (HD)
Audio			
Audio Output	10W + 10W	10W + 10W	10W + 10W
Feature			
Pro-Centric	Type(Smart/Value/Lite)	Smart	Lite
	Streaming Type (P/P/R)	IP/RF	-
Smart	RF (1/2Tuner)	1 Tuner	-
	HGAP (GEM/FLASH/HTML)	GEM/FLASH/HTML	-
Connectivity	Commercial Smart Home	-	-
	Web Browser	-	-
Management	SmartShare(Movie/Photo/Music)	-	-
	WIDI (PC to TV)	-	-
Interactivity	Smart Mirroring (Mobile to TV)	-	-
	WIFI Direct	-	-
Usability	MHL	-	-
	Remote diagnostics/ Self diagnostics	Remote diagnostics	Self diagnostics
Security	EdManager	-	-
	HDMI-CEC	-	-
External Power	HTNG-CEC	-	-
	Built-In WiFi	•(Built-in type)	-
External Speaker Out	Soft AP	-	-
	DRM	-	-
RJP Interface	Welcome Screen/Welcome Video	•/-	•
	Lock Mode	•	•
Auto Off / Auto Sleep	One Channel Map / Logical Channel Map	•	•
	Multi IR Code	•	•
Smart Energy Saving	Hotel Mode / Public Display Mode	•	•
	Instant ON	•	•
Anti-theft System	USB Cloning	•	•
	IR Out	•(RS-232C)	•(RS-232C)
Interface	USB Auto Playback	-	-
	External Power	•(RS-232C, SW/2A or 12V/1A) *Exclusively selectable	-
Side	External Speaker Out	•(Int./Fixed, 3.5mm, Stereo, Single ended Type(GRD,L+,R+), 1W with 8Ω), Line out	•(Int./Fixed, 3.5mm, Stereo, Single ended Type(GRD,L+,R+), 1W with 8Ω), Line out
	RJP Interface	•(RS232C, HDMI CEC)	•(RS232C, HDMI CEC)
Rear	Auto Off / Auto Sleep	•	•
	Smart Energy Saving	•	•
Power	Anti-theft System	Kensington Lock	Kensington Lock
	HDMI In	1	1
Dimension	USB	2	2
	CI Slot	-	-
Set Size (W/O Stand, WxHxD, mm)	Headphone Out	1	1
	AV in	1	1
Set Size (With Stand, WxHxD, mm)	RF In	1	1
	AV In(Composite)	1(RCA Type)	1
Set Weight (With Stand, Set, kg)	Component In (Y, Pb,Pr) + Audio(L,R)	-	1(Common w/AV)
	Digital Audio Out (Optical)	1(Optical)	1(Optical)
Tool	RGB In (D-sub 15pin)	-	1
	Swivel (angle)	-	-
Standard Approval	Clock Interface (D-sub 15pin)	-	-
	VESA Compatibility	43: 200x200 49/55/60: 300x300	32: 200x200 42: 400x400
Safety	PC Audio Input	-	1(Common w/Component Audio)
	Environment	CCC	CCC
Etc. (EEI Grade)	Headphone Out (3.5mm Phone Jack)	-	-
	RS-232C(D-sub 9pin)	1	1
Etc. (EEI Grade)	HDMI In	1	1
	LAN(RJ45)	2	-
Etc. (EEI Grade)	Full Scart	-	-
	MPI Port(RJ12)	-	-
Etc. (EEI Grade)	RJP interface (RJ45)	-	-
	Ext SPK out (3.5mm Phone Jack)	2(Spk-out 1, Vol. Control 1)	1(Spk-out 1)

Series	UX340C	UX310C	LX341C	LX330C
Model Info				
Region	CHINA	CHINA	CHINA	CHINA
Size	55"/65"	43"/49"	43"/49"/55"/60"	42"
Analog	PAL-I, PAL/SECAM BG/DK, NTSC M/AV ONLY	PAL-DK1, NTSC-M	PAL-I, PAL/SECAM BG/DK, NTSC M/AV ONLY	PAL-I, PAL/SECAM BG/DK, NTSC M/AV ONLY
Digital	DTMB/DVB-C	DTMB/DVB-C	DTMB/DVB-C	DTMB/DVB-C
Video				
Resolution	3840 x 2160 (UHD)	3840 x 2160 (UHD)	1920 x 1080 (FHD)	1920 x 1080 (FHD)
Audio				
Audio Output	10W + 10W	10W + 10W	10W + 10W	10W + 10W
Feature				
Pro-Centric	Type(Smart/Value/Lite)	-	-	-
	Streaming Type (P/P/R)	-	-	-
Smart	RF (1/2Tuner)	-	-	-
	HGAP (GEM/FLASH/HTML)	-	-	-
Connectivity	Commercial Smart Home	-	-	-
	Web Browser	-	-	-
Management	SmartShare(Movie/Photo/Music)	-	-	-
	WIDI (PC to TV)	-	-	-
Interactivity	Smart Mirroring (Mobile to TV)	-	-	-
	WIFI Direct	-	-	-
Usability	MHL	-	-	-
	Remote diagnostics/ Self diagnostics	Self diagnostics	-	Self diagnostics
Security	EdManager	-	-	-
	HDMI-CEC	-	-	-
External Power	HTNG-CEC	-	-	-
	Built-In WiFi	-	-	-
External Speaker Out	Soft AP	-	-	-
	DRM	-	-	-
RJP Interface	Welcome Screen/Welcome Video	•	-	•
	Lock Mode	•	-	•
Auto Off / Auto Sleep	One Channel Map / Logical Channel Map	•	-	•
	Multi IR Code	•	-	•
Smart Energy Saving	Hotel Mode / Public Display Mode	•	•(Simple Mode)	•
	Instant ON	•	-	•
Anti-theft System	USB Cloning	•	-	•
	IR Out	•(RS-232C)	-	•(RS-232C)
Interface	USB Auto Playback	-	-	-
	External Power	-	-	-
Side	External Speaker Out	•(Int./Fixed, 3.5mm, Stereo, Single ended Type(GRD,L+,R+), 1W with 8Ω), Line out	-	•(Int./Fixed, 3.5mm, Stereo, Single ended Type(GRD,L+,R+), 1W with 8Ω), Line out
	RJP Interface	•(RS232C, HDMI CEC)	-	•(RS232C, HDMI CEC)
Rear	Auto Off / Auto Sleep	•	-	•
	Smart Energy Saving	•	-	•
Power	Anti-theft System	Kensington Lock	Kensington Lock	Kensington Lock
	HDMI In	-	-	1
Dimension	USB	1	1	1
	CI Slot	1	1	1
Set Size (W/O Stand, WxHxD, mm)	Headphone Out	1	-	1
	AV in	1	-	1
Set Size (With Stand, WxHxD, mm)	RF In	1	1	1
	AV In(Composite)	1	1	1
Set Weight (With Stand, Set, kg)	Component In (Y, Pb,Pr) + Audio(L,R)	1(Common w/AV)	1(Common w/AV)	1(Common w/AV)
	Digital Audio Out (Optical)	1(Optical)	1(Optical)	1(Optical)
Tool	RGB In (D-sub 15pin)	1	-	1
	Swivel (angle)	-	-	-
Standard Approval	Clock Interface (D-sub 15pin)	-	-	-
	VESA Compatibility	55/65: 300x300	43: 200x200 49: 300x300	43: 200x200 49/55/60: 300x300
Safety	PC Audio Input	1(Common w/Component Audio)	-	1(Common w/Component Audio)
	Environment	CCC	CCC	CCC
Etc. (EEI Grade)	Headphone Out (3.5mm Phone Jack)	-	-	-
	RS-232C(D-sub 9pin)	1	1	1
Etc. (EEI Grade)	HDMI In	2	2	1
	LAN(RJ45)	-	-	-
Etc. (EEI Grade)	Full Scart	-	-	-
	MPI Port(RJ12)	-	-	-
Etc. (EEI Grade)	RJP interface (RJ45)	-	-	-
	Ext SPK out (3.5mm Phone Jack)	1(Spk-out 1)	-	1(Spk-out 1)
Voltage, Hz	100~240V, 50/60Hz	100~240V, 50/60Hz	100~240V, 50/60Hz	100~240V, 50/60Hz
	Typical(Watts)	55": 115.6 65": 157	43": 54.2 49": 61.6	43": 80 49": 80 55": 96 60": 133
Stand-by	0.3W	0.3W	0.3W	0.3W
	Set Size (W/O Stand, WxHxD, mm)	55": 1,240 x 722 X 38.6(SPK 56.7) 65": 1,460 X 848 X 40.4(SPK 58.5)	43": 971 X 624 X 198 49": 1,103 X 650 X 39.9(SPK 58.7)	43": 973 x 573 x 37(SPK 55.1) 49": 1,106 x 647 x 37(SPK 55.1) 55": 1,242 x 724 x 37(SPK 55.1) 60": 1,363 x 792 x 39(SPK 57.1)
Set Size (With Stand, WxHxD, mm)	55": 1,240 x 778 x 261 65": 1,460 x 909 x 338	43": 971 X 624 X 198 49": 1,103 X 698 X 198	43": 973 x 625 x 193 49": 1,106 x 697 x 220 55": 1,242 x 774 x 220 60": 1,363 x 844 x 294	961 x 610 x 218
	Set Weight (With Stand, Set, kg)	55": 19.7 65": 29.6	43": 9.8 49": 13.4	43": 12.7 49": 17.6 55": 20.9 60": 29.3
Swivel (angle)	-	-	-	-
	VESA Compatibility	55/65: 300x300	43: 200x200 49: 300x300	43: 200x200 49/55/60: 300x300
Safety	CCC	CCC	CCC	CCC
	Environment	CCC	CCC	CCC
Etc. (EEI Grade)	55"/65": 2 Grade	43"/49": 2 Grade	43/49/55": 2 Grade 60": 1 Grade	2 Grade

CHINA

Series	LX310C	LX300C	LX540S	LX330S	
Model Info					
Region	CHINA	CHINA	CHINA	CHINA	
Size	43"/49"	32"/43"/49"	43"/49"/55"	42"	
Analog	PAL-DK/I, NTSC-M	PAL-DK/I, NTSC-M	PAL-I, PAL/SECAM B/G/DK, NTSC M/AV (ONLY)	PAL-I, PAL/SECAM B/G/DK, NTSC M/AV (ONLY)	
Digital	DTMB	DTMB	DTMB/DVB-C	DTMB/DVB-C	
Video					
Resolution	1920 x 1080 (FHD)	43"/49": 1920 x 1080 (FHD) 32H": 1366 x 768 (HD)	1920 x 1080 (FHD)	1920 x 1080 (FHD)	
Audio					
Audio Output	5W + 5W	43"/49": 5W + 5W 32H": 3W + 3W	10W + 10W	10W + 10W	
Feature					
Pro-Centric	Type(Smart/Value/Lite) Streaming Type (P/RF) RF (1/2Tuner) HGAP (GEM/FLASH/HTML)	- - - -	- - - -	- - - -	
Smart	Commercial Smart Home Application Web Browser SmartShare(Movie/Photo/Music)	- - -	- - -	- - -	
Connectivity	WDI (PC to TV) Smart Mirroring (Mobile to TV) WiFi Direct	- - -	- - -	- - -	
Management	MHL Remote diagnostics/ Self diagnostics EzManager	- - -	Self diagnostics - -	Self diagnostics - -	
Interactivity	HDMI-CEC HTNG-CEC	- -	• •	• •	
Usability	Built-In WiFi Soft AP	- -	- -	- -	
Security	DRM	-	-	-	
Lock Mode	Welcome Screen>Welcome Video Lock Mode One Channel Map / Logical Channel Map Multi IR Code Hotel Mode / Public Display Mode	- - - - •(Simple Mode)	•/ • • • •	•/ • • • •	
Instant ON	Instant ON	-	-	-	
USB Cloning	USB Cloning	-	-	-	
IR Out	IR Out	-	•(RS-232C)	•(RS-232C)	
USB Auto Playback	USB Auto Playback	-	-	-	
External Power	External Power	-	-	-	
External Speaker Out	External Speaker Out	-	•(Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND.L+,R+), 1W with 8Ω)	•(Variable/Fixed/Line Out, 3.5mm, Stereo, Single ended Type(GND.L+,R+), 1W with 8Ω)	
RJP Interface	RJP Interface	-	•LG/Teledapt (RS232C), Teledapt/Guestlink (HDMI CEC)	•LG/Teledapt (RS232C), Teledapt/Guestlink (HDMI CEC)	
Auto Off / Auto Sleep	Auto Off / Auto Sleep	•	•	•	
Smart Energy Saving	Smart Energy Saving	•	•	•	
Anti-theft System	Anti-theft System	Kensington Lock	Kensington Lock	Kensington Lock	
Interface					
Side	HDMI In	1	-	1	
	USB	1	-	2	
	CI Slot	-	-	1	
	Headphone Out	-	-	1	
	AV in	-	-	1	
Rear	RF In	1	1	1	
	AV In(Composite)	-	1	1	
	Component In (Y, Pb,Pr) + Audio(L,R)	1(Common w/AV)	1(Common w/ AV)	1(Common w/AV)	1(Common w/AV)
	Digital Audio Out (Optical)	1(Optical)	-	1(Optical)	1(Optical)
	RGB In (D-sub 15pin)	-	-	1	1
	Clock Interface (D-sub 15pin)	-	-	-	-
	PC Audio Input	-	-	1(Common w/Component Audio)	1(Common w/Component Audio)
	USB	-	-	-	-
	Headphone Out (3.5mm Phone Jack)	-	-	-	-
	RS-232C(D-sub 9pin)	-	-	1	1
Power	Voltage, Hz	100-240V, 50/60Hz	110-240V, 50/60Hz	100-240V, 50/60Hz	
	Typical(Watts)	43": 54.2 49": 61.6	32": 30.6 43": 49 49": 62	43": 81.6 49": 80.7 55": 96.3	TBD
	Stand-by	0.3W	0.3W	0.5W	TBD
	Dimension				
	Set Size (W/D Stand, WxHxD, mm)	43": 971 x 575 x 39.9 (SPK 58.7) 49": 1,103 x 650 x 39.9 (SPK 58.7)	32": 734 x 438 x 66.5 (SPK 71) 43": 976 x 583 x 69.5 (SPK 81.5) 49": 1,108 x 657 x 69.5 (SPK 81.5)	43": 973 x 573 x 37 (SPK 55.1) 49": 1,106 x 647 x 37 (SPK 55.1) 55": 1,242 x 724 x 37 (SPK 55.1)	961 X 567 X 55.5
Set Size (With Stand, WxHxD, mm)	43": 971 x 624 x 198 49": 1,103 x 698 x 198	32": 734 x 474 x 172 43": 976 x 621 x 208.7 49": 1,108 x 696 x 208.7	43": 973 x 625 x 193 49": 1,106 x 697.5 x 220 55": 1,242 x 774 x 220	961 X 610 X 218	
Set Weight (With Stand, Set, kg)	43": 9.8 49": 13.4	32": 4.7 43": 8.5 49": 10.9	43": 12.7 49": 17.6 55": 20.9	9.5	
Tool					
Swivel (angle)	-	-	-	-	
VESA Compatibility	43 : 200x200 49 : 300x300	32/43 : 200x200 49 : 300x300	43" : 200 X 200 49"/55" : 300 X 300	400 X 400	
Standard Approval					
Safety	CCC	CCC	CCC	CCC	
Environment	CCC	CCC	-	-	
Etc.	43/49" : 2 Grade	32/43/49" : 3 Grade	43" : 2 Grade 49" : 2 Grade 55" : 2 Grade	2 Grade	

HK_TT

Series	LX761H	LX330C	LY540H	LX341C	LX330C	
Model Info						
Region	HK	HK	Taiwan	Taiwan	Taiwan	
Size	43"/49"/55"/65"	32"/42"/56"/65"	42"/47"	43"/49	32H/42	
Analog	PAL-I, PAL/SECAM B/G/DK, NTSC M/AV (ONLY)	PAL-I, PAL/SECAM B/G/DK, NTSC M/AV (ONLY)	NTSC M	NTSC M	NTSC M	
Digital	DTMB/DVB-C(Ready)	DTMB/DVB-C(Ready)	DVB-T	DVB-T2	DVB-T2	
Video						
Resolution	1920 x 1080 (FHD)	1920 x 1080 (FHD)	1920 x 1080 (FHD)	1920 x 1080 (FHD)	42" : 1920 x 1080 (FHD) 32H" : 1366 x 768 (HD)	
Audio						
Audio Output	10W + 10W	10W + 10W	10W + 10W	10W + 10W	10W + 10W	
Feature						
Pro-Centric	Type(Smart/Value/Lite) Streaming Type (P/RF) RF (1/2Tuner) HGAP (GEM/FLASH/HTML)	Smart Lite IP/RF 1 Tuner GEM/Flash/HTML	Value - RF 1 Tuner GEM/Flash	Lite - - - -	Lite - - -	
Smart	Commercial Smart Home Application Web Browser SmartShare(Movie/Photo/Music)	- • -	- - -	- - -	- - -	
Connectivity	WDI (PC to TV) Smart Mirroring (Mobile to TV) WiFi Direct	• • -	- - -	- - -	- - -	
Management	MHL Remote diagnostics/ Self diagnostics EzManager	- Remote diagnostics •	- Self diagnostics •	- Self diagnostics •	- Self diagnostics •	
Interactivity	HDMI-CEC HTNG-CEC	• •	• •	• •	• •	
Usability	Built-In WiFi Soft AP	• •	• •	• •	• •	
Security	DRM	-	-	-	-	
Lock Mode	Welcome Screen>Welcome Video Lock Mode One Channel Map / Logical Channel Map Multi IR Code Hotel Mode / Public Display Mode	•/ • • • •	•/ • • • •	• • • • •	• • • • •	
Instant ON	Instant ON	•	•	•	•	
USB Cloning	USB Cloning	•	•	•	•	
IR Out	IR Out	•(RS-232C)	•(RS-232C)	•(RS-232C)	•(RS-232C)	
USB Auto Playback	USB Auto Playback	•	•	•	•	
External Power	External Power	-	-	-	-	
External Speaker Out	External Speaker Out	•(Int./Fixed, 3.5mm, Stereo, Single ended Type(GND.L+,R+), 1W with 8Ω), Line out	•(Int./Ext Variable/Fixed, 3.5mm, Stereo, Single ended Type(GND.L+,R+), 1W with 8Ω), Line out	•(Int./Fixed, 3.5mm, Stereo, Single ended Type(GND.L+,R+), 1W with 8Ω), Line out	•(Int./Fixed, 3.5mm, Stereo, Single ended Type(GND.L+,R+), 1W with 8Ω), Line out	
RJP Interface	RJP Interface	•(RS232C, HDMI CEC)	•(RS232C, HDMI CEC)	•(RS232C, HDMI CEC)	•(RS232C, HDMI CEC)	
Auto Off / Auto Sleep	Auto Off / Auto Sleep	•	•	•	•	
Smart Energy Saving	Smart Energy Saving	•	•	•	•	
Anti-theft System	Anti-theft System	Kensington Lock	Kensington Lock	Kensington Lock	Kensington Lock	
Interface						
Side	HDMI In	1	1	1	1	
	USB	2	2	2	2	
	CI Slot	-	-	-	-	
	Headphone Out	1	1	1	1	
	AV in	-	-	-	-	
Rear	RF In	1	1	1	1	
	AV In(Composite)	1(RCA Type)	1	1	1	
	Component In (Y, Pb,Pr) + Audio(L,R)	-	1(Common w/AV)	1(Common w/AV)	1(Common w/AV)	
	Digital Audio Out (Optical)	1(Optical)	1(Optical)	1(Optical)	1(Optical)	
	RGB In (D-sub 15pin)	-	1	1	1	
	Clock Interface (D-sub 15pin)	-	-	-	-	
	PC Audio Input	-	1(Common w/Component Audio)	1(Common w/Component Audio)	1(Common w/Component Audio)	
	USB	-	-	-	-	
	Headphone Out (3.5mm Phone Jack)	-	-	-	-	
	RS-232C(D-sub 9pin)	1	1	1	1	
Power	Voltage, Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	
	Typical(Watts)	43/49" : 80 55" : 96 65" : 130	32" : 60 42" : 65 50" : 75 55" : 90	42" : 88 47" : 93	49" : 80 55" : 96	32" : 60 42" : 84
	Stand-by	0.3W	0.3W	0.3W	0.3W	0.3W
	Dimension					
	Set Size (W/D Stand, WxHxD, mm)	43": 973 x 573 x 37 (SPK 55.1) 49": 1,106 x 647 x 37 (SPK 55.1) 55": 1,242 x 724 x 37 (SPK 55.1) 65": 1,461 x 848 x 39 (SPK 57.3)	32": 732 x 437 x 55.5 42": 961 x 612 x 55.5 50": 1,128 x 680 x 55.8 55": 1,243 x 725 x 56.8	42": 961 x 607 x 55.5 47": 1,073 x 629 x 55.8	49": 1,106 x 647 x 55.1 55": 1,242 x 724 x 55.1	32": 732 x 437 x 55.5 42": 961 x 612 x 55.5
Set Size (With Stand, WxHxD, mm)	43": 973 x 625 x 193 49": 1,197 x 697.5 x 220 55": 1,242 x 774 x 220 65": 1,461 x 899 x 234	32": 732 x 481 x 207 42": 961 x 612 x 218 50": 1,128 x 709 x 247 55": 1,243 x 772 x 247	42": 961 X 610 X 218 47": 1,073 X 676 X 255	49": 1,106 x 697 x 220 55": 1,242 x 774 x 220	32": 732 x 481 x 207 42": 961 x 612 x 218	
Set Weight (With Stand, Set, kg)	43" : 12.7 49" : 17.6 55" : 20.9 65" : 34	32" : 6.2 42" : 9.5 50" : 14.2 55" : 17.7	42" : 9.5 47" : 12.7	49" : 17.6 55" : 20.9	32" : 6.2 42" : 9.5	
Tool						
Swivel (angle)	-	-	-	-	-	
VESA Compatibility	43" : 200 X 200 49"/55" : 300 X 300	32 : 200x200 42/50/55 : 400x400	42/47 : 400x400	300 X 300	32 : 200x200 42 : 400x400	
Standard Approval						
Safety	CB	CB	BSMI	BSMI	BSMI	
Environment	CB	CB	BSMI	BSMI	BSMI	
Etc. (HongKong Energy Label)	1	1	-	-	TBD	



- KOREA HQ
- WESTERN EUROPE
- CENTRAL EUROPE
- CIS
- NORTH & SOUTH AMERICA
- MIDDLE EAST & AFRICA
- ASIA

GLOBALNETWORK

<p>WESTERN EUROPE</p> <p>LG Electronics Germany GmbH Jakob-Kaiser Strasse 12, 47877 Willich, Germany Tel: 49-2154-492-181 Fax: 49-2154-492-214</p> <p>LG Electronics Italia S.P.A. Via Dell'Unione Europea, 20097, San Donato Milanese(MI), Italy Tel: 39-02-5180-1124 Fax: 39-2-5776-0556</p> <p>LG Electronics Hellas S.A. Ethnarchou Makariou St. Delta Paléo Falero PO Box 77331 GR17501 Paleo Falero, Athens Greece Tel: 30-210-9490-709 Fax: 30-210-4800-510</p> <p>LG Electronics France S.A.R.L. Paris Nord II 117, Avenue des Nations-BP 59372 Villepinte 95942 Rosny CDG CEDEX, France Tel: 33-1-49-89-89-41 Fax: 33-1-49-89-89-39</p> <p>LG Electronics Benelux Krijgsman 1, 1186 DM Amstelveen, The Netherlands Tel: 31-20-456-3205</p> <p>LG Electronics U.K. Ltd. LG House 250 Bath Road, Slough, Berkshire SL1 4DX U.K. Tel: 44-17-5349-1585 Fax: 44-17-5369-3061</p> <p>LG Electronics Nordic AB PO Box 83 Edogatan 18 SE-164 94 Kista, Sweden Tel: 46-8-5664-1540 Fax: 46-8-5664-1599</p> <p>LG Electronics Norway Lysaker Torv 15 Postboks 275 1326 Lysaker Norge Tel: 47-67-11-10-90 Fax: 47-67-11-10-99</p> <p>LG Electronics Denmark Kalevebod Brygge 47 2 sal., 1560 Copenhagen V, Denmark Tel: 45-70-25-06-80 Fax: 45-70-25-06-81</p> <p>LG Electronics Finland Aynite 12 A 01510 Vantaa Suom Tel: 358-4-249-0311 Fax: 358-9-222-77-20</p> <p>LG Electronics Espana S.A. Complejo Europa Empresarial, Ctra. N-VI Km 24, 28230, Las Rozas(Madrid), Spain Tel: 34-91-2112-261 Fax: 34-91-2112-257</p> <p>LG Electronics Portugal S.A. Quinta da Fonte - Edificio D. Amélia Rua Vitor Camara, 2 Piso 2, 2770-229 Paço de Arcos, Portugal Tel: 35-121-120-1069 Fax: 35-121-120-2241</p> <p>LG Electronics Austria GMBH Office Campus Gasometer, Guglgasse 15, Bauwerk Aa/Stock 586, A-1110 Wien, Austria Tel: 43-1-74015-2006 Fax: 43-1-99460-5629</p> <p>LG Electronics Poland SP.Z.O.O 4F Pasat Building Al. Jerozolimskie 162A, 02-342 Warszawa, Polska Tel: 48-22-481-7310 Fax: 48-22-606-1459</p>	<p>LG Electronics Hungary Kft. H-1097 Budapest, Konyves Kalman krt. 3/A, Hungary Tel: 36-1-455-8830 Fax: 36-1-216-3074</p> <p>LG Electronics Romania S.R.L. 17-21 Bucaresti-Plonesti Banansa Center, 5th Floor Bucharest, Romania Tel: 40-21-233-2491 Fax: 40-21-233-2478</p> <p>LG Electronics CZ, S.R.O Zalby Andel - Nadrazni 23/344 151 34 Praha 5, Czech Republic Tel: 420-234-094-631</p> <p>LG Electronics Moscow Office(LGERU) Capital Plaza 6-7th floor, 4, 4th Lesnoy Pereulok, Moscow, 125047, Russia Tel: 7-095-933-6522 Fax: 7-095-933-6567</p> <p>LG Electronics Austria GMBH Office Campus Gasometer, Guglgasse 15, Bauwerk Aa/Stock 586, A-1110 Wien, Austria Tel: 43-1-74015-2006 Fax: 43-1-99460-5629</p> <p>LG Electronics St. Petersburg Office Business Center 'Nepitur', 3rd Floor St.Petersburg, Russia Tel: 7-812-320-2610 Fax: 7-812-320-2611</p> <p>LG Electronics Vladivostok Office 12th Floor Sa, Uboevich, Str. Vladivostok, 690091, Russia Tel: 7-4232-650-921 7-4232-650-924</p> <p>LG Electronics Inc. Kiev Office office 3-A, 3rd floor, 1 Dniprovsky Uzviz, 01010, Kiev, Ukraine Tel: 38-044-201-4352 Fax: 38-044-210-4373</p>	<p>LG Electronics Kazakhstan Molodzhynaya Street 2(A) Almaty, 480080, Kazakhstan Tel: 7-327-2725-8031 Fax: 7-327-275-8290</p> <p>LG Electronics Inc. Tashkent Office 3RD Floor, 89NUJUS STR, Tashkent, 700025, Uzbekistan Tel: 998-71-120-6260 Fax: 998-71-120-6223</p> <p>LG Electronics Latvia SIA Gredu Iela 4a, Riga, LV-1019 Tel: 371-731-1383 Fax: 371-731-1338</p> <p>LG Electronics Inc. Minsk Office Kozlov Lane, 7, 9th Floor, 220037, Minsk, Belarus Tel: 375-17-2979456 Fax: 375-17-2351994</p> <p>LG Electronics Inc. Chisinau Office 36a (2nd floor), Bukaresti street, Chisinau, Moldova Tel: 373-22-26-0535 Fax: 373-22-26-0537</p> <p>LG Electronics U.S.A., Inc. 1000 Sylvan Avenue, Englewood Cliffs, NJ 07632, USA Tel: 1-201-816-2000 Fax: 1-201-816-2188</p> <p>LG Electronics U.S.A., Inc. 2000 Millbrook Drive, Lincolnshire, IL 60069, USA Tel: 1-847-941-8737 Fax: 1-847-941-8763</p>	<p>LG Electronics Canada, Inc. 20 Norelok Drive North York, ON M9L 2X6 Canada Tel: 1-447-253-6300</p> <p>LG Electronics Mexico S.A. De CV Sor Juana Ines de la Cruz, No 555, Col. San Lorenzo, Tlalapehuala, Escado de Mexico, C.P.54033, Mexico Tel: 52-555-321-1921 Fax: 52-555-321-1929</p> <p>LG Electronics Panama S.A. Miami Office 8300 NW 53rd Street Suite 302, Doral, FL 33166 Tel: 1-305-477-1882</p> <p>LG Electronics Colombia Ltd Autopista Medellin Kilometro 1.8 Costado Sur-solo Industrial Torre B Bogota, Colombia Tel: 571-587-5454 Fax: 571-587-6240, 6250</p> <p>LG Electronics Peru, S.A. Av. Republica de panama 3055, Piso 11, San Isidro, Lima, Peru Tel: 51-1-440-4500 Fax: 51-1-421-0548</p> <p>LG Electronics de San Paulo, Ltda Market Place Tower 2, Av. Dr. Chuzi Zaidan, 940-3rd Floor, Via Condessa, Sao Paulo-SP, CEP04583-110 Tel: 55-11-2162-5454 Fax: 55-11-2162-5600</p> <p>LG Electronics Inc. Chile Limitada Av.Presidente Resco 5711, Piso 2, Las Condes, Santiago, Chile Tel: 56-2-438-6900</p>	<p>LG Electronics Argentina S.A. Av. Del Libertador 498-Piso 22 (C1001ABR)-Capital Federal, Argentina Tel: 54-11-5352-5454</p> <p>MIDDLE EAST & AFRICA</p> <p>Tehran Office No 53 Daszgeri (Zafar) street, Dr. Shariati Avenue, Tehran, Iran Tel: 98-21-226-9705 Fax: 98-21-226-9706</p> <p>Jeddah Office Elegant House Building, Prince Abdullah Street PO. Box 10876, Jeddah 21443, KSA Tel: 966-2-263-1740 Fax: 966-2-263-1739</p> <p>LG Electronics S.A. (Pty) Ltd LG House, Rand Airport Road, Raceway Industrial Park, Monte Carlo Drive, Gosforth Park, Germiston 1419 PO Box 973, Alberton 1450, South Africa Tel: 27-11-323-8304, 273-447-9172 Fax: 27-11-822-5754</p> <p>LG Electronics Egypt Cairo 3/1 El Lasaki Street With Palestine Street New Maadi 2, Cairo, Egypt Tel: 202-520-2827 Fax: 202-754-7683</p> <p>LG Electronics Morocco 4th & 5th Floor on BLDG No 3&4, Zenith Millennium, Sidi Maarouf, Lotissement Actaoufik, Casablanca, Morocco Tel: 212-2-297-3232 Fax: 212-2-297-3288</p> <p>Karachi Office 5th-8, 4th Floor, Tower-A Technology Park, Main Shahrah-e-Faisal, Karachi-Pakistan Tel: 92-21-278-9438-9 Fax: 92-21-278-7463</p> <p>Tunis Office Immaoula Le Prince du Lac, Appartement No.1, Rue du Lac, Tourkana No.1, Les Berges du Lac, Tunis, Tunisie Tel: 216-71-861-060 Fax: 216-71-861-081</p> <p>LG Electronics Algeria Office 214 Box des Cars 2, Dely Ibrahim, Alger, Algeria, LG Electronics Inc. Bureau d'Algerie Tel: 213-21-484-1777 Fax: 213-21-60-6490</p> <p>Lagos Office LG Electronics Nigeria Ltd. 65, Oshodi Road, Inaja, Lagos, Nigeria Tel: 23-4-1894-5948</p> <p>LG Electronics TICANT, A.S. Kaptargosha Mah. Piyalipasa Bulvarı No.14 Olmeydan Sok. Istanbul, Turkey Tel: 90-214-644-6543</p> <p>LG Electronics Gulf FZE PO Box 61445, Jebel Ali, Dubai, UAE Tel: 971-4-8812191 Fax: 971-4-8813995</p> <p>Abdoun, Princess Basma Street, Near Darak Directorate of diplomatic security, Issam Al-Khateeb Complex, 1st floor, PO. Box 930254 Amman, 11193, Jordan Tel: 962-6-568-4309 Fax: 962-6-565-2863</p>	<p>ASIA</p> <p>LG Electronics U.S.A., Inc. www.lgusa.com</p> <p>LG Electronics Canada, Inc. www.lg.ca</p> <p>LG Electronics U.S.A., Inc. www.lgcommercial.com</p> <p>LG Electronics Panama, S.A.</p> <p>LG Electronics Mexico S.A. De CV.</p> <p>LG Electronics Colombia, Ltda.</p> <p>LG Electronics Peru, S.A.</p> <p>LG Electronics de Sao Paulo, Ltda.</p> <p>LG Electronics Inc. Chile Limitada</p> <p>LG Electronics Argentina SA</p> <p>LG Electronics U.S.A., Inc. www.lgusa.com</p> <p>Westlands Office Park Wayakiway Croud Floor Acacia House PO. Box 505, Nairobi Tel: 25-420-445-1757</p> <p>Israel Office 11 Galgaly Haplada St. Herzliya 46733, Israel Tel: 972-9-954-9241 Fax: 972-9-954-9242</p> <p>Thuong Kiet Hansi Vietnam SCBD J1, Jend. Sudirman Kav 52-53 Jakarta Selatan 12190, Indonesia Tel: 84-4-9345151 Fax: 84-4-9345153-2</p> <p>LG Electronics Vietnam Co Ltd 14Th Floor Hansi Central office Building 448 LY Thuong Kiet, Hanoi, Vietnam Tel: 84-4-9345151 Fax: 84-4-9345153-2</p> <p>LG Electronics Hoachinh Office 6th Floor, Central Park Office B/D 208 Nguyen Trai Str., Dist. 1 Hoachinh, Vietnam Tel: 84-8-925-886</p> <p>LG MTR Electronics Co. Ltd 84 Moo 12 Phakasem Road Samut Sakorn 74310, Thailand Tel: 662-260-8787 Fax: 662-260-8800</p> <p>LG Electronics Thailand IT Sale Division 75/80-83 Richmond Bldg, 22nd Floor, Sukhumvit 26, Klongtoey, Bangkok 10110 Tel: 66-81-684-5197</p> <p>Axis Global Technologies, Inc. 20 North Road Corner 3rd Avenue, Cuban, Quezon City Tel: 63-724-3340 loc. 4302</p> <p>LG Electronics India Pvt Ltd. Plot No.51, Udyog Vihar, Phase-2 Surajpur-Kaana Road Greater, Noida UP(201306), India Tel: 91-9811-354-863</p> <p>LG Electronics Philippines, Inc. No 15 Flngasp St., Maybanga 1607 Pasig City, Philippines Tel: 63-2-641-4181-5</p> <p>LG Electronics Singapore Pte LTD 6 Temasek Boulevard #10-01 Suntec Tower 4 Singapore 038986 Tel: 65-6-512-0546</p> <p>LG Electronics Hong Kong 6F, 633 Building, 633 King's Road North Point, Hong Kong</p> <p>LG Electronics Taiwan Taipei Co., Ltd 7F, No. 47, Lane 3, Jhu Road, NeiHu District, Taipei City, Taiwan, R.O.C</p> <p>LG Electronics Malaysia A-08-01 Level 8, Block A, P18 No 23 Jalan Baraz, Seksyen 8 46050 Petaling Jaya Selangor Darul Ehsan, Malaysia Tel: 60-3-7962-7777</p> <p>LG Electronics Taiwan Taipei Co., Ltd 7F, No. 47, Lane 3, Jhu Road, NeiHu District, Taipei City, Taiwan, R.O.C</p> <p>LG Electronics Malaysia A-08-01 Level 8, Block A, P18 No 23 Jalan Baraz, Seksyen 8 46050 Petaling Jaya Selangor Darul Ehsan, Malaysia Tel: 60-3-7962-7777</p> <p>LG Electronics Thailand IT Sale Division 75/80-83 Richmond Bldg, 22nd Floor, Sukhumvit 26, Klongtoey, Bangkok 10110 Tel: 66-81-684-5197</p> <p>Axis Global Technologies, Inc. 20 North Road Corner 3rd Avenue, Cuban, Quezon City Tel: 63-724-3340 loc. 4302</p>
--	---	--	---	---	---